

D E L A W A R E

HOMEOWNERS HANDBOOK TO PREPARE FOR NATURAL HAZARDS



HOMEOWNERS HANDBOOK TO PREPARE FOR NATURAL HAZARDS

Delaware Sea Grant



ACKNOWLEDGMENTS

This handbook was developed as a cooperative project among the Delaware Emergency Management Agency (DEMA), the Delaware Department of Natural Resources and Environmental Control (DNREC), and the Delaware Sea Grant College Program (DESG). A key priority of this project partnership is to increase the resiliency of coastal communities to natural hazards. One major component of strong communities is enhancing individual resilience and recognizing that adjustments to day-to-day living are necessary. This book is designed to promote individual resilience, thereby creating a fortified community.

This handbook would not have been possible without support and input from numerous individuals who include Mike Powell, Greg Williams, Kim McKenna, Jennifer Wheatley, Tony Pratt, Jennifer de Mooy, and Morgan Ellis (DNREC); Ed Strouse, Dave Carlson, and Don Knox (DEMA); Joe Thomas (Sussex County Emergency Operations Center); Colin Faulkner (Kent County Department of Public Safety); Dave Carpenter, Jr. (New Castle County Office of Emergency Management); George Giles (Wilmington Office of Emergency Management); Ruth Campbell (Delaware Department of Health and Social Services); Jerry Pickard (American Red Cross, Delmarva Region); Dwayne Day (Delaware Department of Transportation); Bill Coulbourne (ATC); Vince Jacono (Delmarva Power); Brad Ebaugh (Delaware Electric Cooperative); Joe Miketta (NOAA National Weather Service); Dan Leathers (University of Delaware); JoAnn Neumann (Delaware Department of Insurance); John Ingargiola (Federal Emergency Management Agency—FEMA); Dennis J. Hwang (University of Hawai'i Sea Grant College Program); Tracie Sempier (Mississippi-Alabama Sea Grant Consortium); Kevin Friday and Gregg Seavey (Simpson Strong-Tie); Kevin McLaughlin (KMD Design Inc.); and Ron Ohrel, Teresa Messmore, Tammy Beeson, and Pam Donnelly (DESG Marine Public Education Office).

It is our hope that the information contained within this handbook, which is in part a compilation from numerous publications associated with natural hazards and hazard mitigation, will be widely used and adopted by homeowners in Delaware and the region.

The Delaware Sea Grant College Program would like to thank the University of Hawai'i Sea Grant College Program for allowing us to model this handbook after the original Homeowners Handbook authored by Dennis Hwang and Darren Okimoto. A special thanks to Dennis, Darren, and the Mississippi-Alabama Sea Grant Consortium for providing the template and graphics used in preparation of the Delaware handbook.

Financial support for the handbook was provided by DEMA through FEMA's Hazard Mitigation Grant Program (5% Initiative) and DNREC's Division of Watershed Stewardship, Shoreline and Waterway Management Section. This handbook was prepared by Wendy Carey in her role as Delaware Sea Grant Marine Advisory Service Agent to further the outreach objectives of the Delaware Sea Grant College Program, National Oceanic and Atmospheric Administration, and U.S. Department of Commerce. The statements, findings, conclusions, and recommendations are those of the author and do not necessarily reflect the views of the National Oceanic and Atmospheric Administration or the Department of Commerce.

D E L A W A R E

HOMEOWNERS HANDBOOK TO PREPARE FOR NATURAL HAZARDS



Published by the
Delaware Sea Grant College Program
December 2012
Version 1.1



Hurricane Sandy

On Oct. 29, 2012, Hurricane Sandy moved westward over Delaware as it made landfall in southern New Jersey. According to the Delaware State Climatologist, Sandy was a storm of unprecedented strength, bringing extreme tidal flooding, heavy precipitation, strong winds, and record low atmospheric pressure to Delaware. Had this storm tracked slightly differently or made landfall further south, significantly greater impacts would have been experienced in Delaware, including higher wind speeds and more severe flooding. Hurricane Sandy made landfall as this publication was preparing to go to press. While the next edition will include more about this devastating storm, a brief overview of Sandy's characteristics and impacts is provided on this page. Detailed information about Hurricane Sandy can be found on the Delaware State Climatologist (climate.udel.edu) and Delaware Geological Survey (dgs.udel.edu) websites.

Tides: The Delaware Geological Survey reports that nine record-high tide levels were recorded at tide gauges located on the Nanticoke River, the Inland Bays, and along the tidal portion of the Delaware River and its tributaries north of the Chesapeake and Delaware Canal (dgs.udel.edu).

Precipitation: Rainfall data provided by the Delaware Environmental Observing System (DEOS) show that totals ranged from a high of 10.98 inches along Delaware's Atlantic coast to 5.21 inches in New Castle County. The lighter rainfall in northern Delaware and adjacent states limited flooding in Delaware non-tidal streams (deos.udel.edu).

Wind: DEOS stations throughout the state recorded peak wind gusts in the upper 40 mph range from the Atlantic coast to New Castle County. Lower wind speeds across Delaware minimized the number of downed trees and power lines when compared to our neighbors to the north (climate.udel.edu).

Atmospheric Pressure: The State Climatologist reports that Sandy generated the lowest atmospheric pressure ever recorded in many, if not all, portions of the state as the storm moved through Delaware. The lowest pressure recorded was 954 millibars at the DEOS station in Claymont (deos.udel.edu).



Hurricane Sandy impacts in Delaware included storm surge, overwash, and flooding along coastal areas adjacent to the Atlantic Ocean, Delaware Bay, and Inland Bays. Images courtesy of Delaware Sea Grant



Contents

Part 1 — Introduction	1
1.1 Common Myths and Reasons to Prepare	2
1.2 Things You Can Do to Prepare.....	5
Part 2 — Natural Hazards: An Overview for Homeowners	9
2.1 Coastal Storm Hazards.....	9
2.1.1 Hurricanes—Tropical Systems.....	9
2.1.2 Northeasters—Extratropical Storms	15
2.2 Flood Hazards	18
2.3 Tornado Hazards.....	21
2.4 Additional Hazards	24
Part 3 — Protecting Yourself and Your Family	28
3.1 Emergency Supplies	28
3.2 Evacuation Kit.....	30
3.3 Evacuation Planning	31
3.4 Key Definitions	34
3.5 Emergency Notification Systems	36
3.6 Preparations Before a Hurricane or Coastal Storm	39
3.7 Evacuation Procedures for a Hurricane or Coastal Storm.....	40
3.8 Preparedness, Safety, and Evacuation Procedures for a Flood.....	41
3.9 Preparedness and Safety Procedures for a Tornado.....	42
3.10 Emergency Information and Contacts.....	42
Part 4 — Protecting Your Property	44
4.1 Creating the Wind- and Rain-Resistant Envelope.....	47
4.1.1 Keep Your Roof On	48
4.1.2 Keep Water Out.....	56
4.1.3 Window and Door Coverings	60
4.1.4 Trees	70



4.1.5 Safe Rooms	71
4.2 Electrical and Power Issues	72
4.2.1 Alternate Power Sources	74
4.2.2 Generators	75
4.2.3 Power Stations	76
4.2.4 Inverters	77
4.2.5 Battery Chargers	77
4.3 Licensed Contractors	77
4.4 Hazard Mitigation Assistance Program	78

Part 5 — Protecting Your Property with Insurance 80

5.1 General Insurance Information	81
5.2 Flood Insurance	84

Part 6 — Climate Change and Potential Impacts on Natural Hazards 86

6.1 Climate Change	86
6.2 Regional Climate Trends	87
6.3 Potential Climate Change Impacts on Natural Hazards in Delaware	89
6.4 Hazard Mitigation and Climate Change Adaptation	92

Appendix A — Emergency Contact Information 94

Appendix B — Shelter Information 96

Appendix C — Construction at the Coast, Beach Management, and Coastal Property Checklist 99

Endnotes 109

Acronyms and Abbreviations 112

Useful Links and Resources 113



Part 1

Introduction

Your home is your castle. It protects you and your family, as well as your possessions, from the elements. For many, the home is a major financial investment. Yet natural hazards such as coastal storms, floods, high winds, and tornadoes can threaten the inhabitants and contents of your home. When a natural disaster occurs, the results can be devastating.

This handbook was created to help you prepare for natural hazards so that risks to family and property may be reduced. While it is never possible to eliminate all damage from a natural disaster, you as a homeowner can take action and implement many small and cost-effective steps that could significantly lower your risk. Mother Nature can be intense. Your family and home deserve the protection that only you can provide.

This handbook is divided into six parts. This introduction presents the purpose and layout of the handbook and includes a discussion of common myths that may have prevented you from taking action in the past. There is also a summary of the content of this handbook in the form of several things you can do to prepare. Part 2 provides basic information on coastal storms, flooding, and other hazards that will allow you to make an educated decision about the steps to take to protect your family and property. Part 3 discusses in detail how to protect yourself and your family. It includes recommendations for essential emergency supplies, evacuation kits, and evacuation planning and evacuation procedures and important information that emergency management agencies want you to know even before a warning is issued. Part 4 covers how you can protect your property from wind and water hazards. Part 5 presents general insurance information and resources to aid in recovery if storm damage occurs. Part 6 provides an overview of climate change in the Mid-Atlantic region and how climate change may exacerbate impacts of natural hazards in the future.

This handbook is available as a free downloadable file at the following websites:

- University of Delaware Sea Grant College Program
(deseagrant.org/products/2012-homeowners-handbook)





- Delaware Department of Natural Resources and Environmental Control (DNREC) (dnrec.delaware.gov/swc)
- Delaware Emergency Management Agency (dema.delaware.gov)
- StormSmart Coasts designed for Delaware (destormsmart.org/handbook)

This handbook will be updated on an as-needed basis as new information becomes available and feedback from the public is obtained. For general emergency information you can contact your state or county emergency management agencies at the addresses and phone numbers provided (see Appendix A) or the Delaware Citizen Corps, a Prepare Delaware initiative (delawarecitizen corps.org).



1.1 COMMON MYTHS AND REASONS TO PREPARE

You may be among the many homeowners in Delaware who have not fully prepared for a natural disaster because of complacency caused by several myths. The most common myths appear as quotes below and are discussed in order to remove some of the major barriers to taking action and to encourage people to prepare.

Myth 1: “A natural hazard won’t affect me.”

Scientists agree that it is not a matter of if the next major coastal storm will occur, but when. Over the past 30 years, Delaware has experienced approximately 85 meteorologically significant coastal storm events, including northeasters and tropical systems.¹¹ As recently as 2008 and 2009, severe northeasters resulted in property damage and flooding along Delaware’s coastlines. In 2011, Hurricane Irene posed a real and significant threat to all of Delaware—spawning a tornado and resulting in widespread rainfall, flooding, and evacuations. Delaware has been fortunate during the last few decades, but there is a good chance you will experience impacts from a major natural hazard event in your lifetime.

Myth 2: “I survived hurricanes Isabel and Irene, so I am sufficiently prepared.”

Many people have the impression that if they survived past hurricanes, they do not need to prepare any more than they did previously. Although previous storms resulted in widespread damage along the East Coast, their



impacts to Delaware could have been much more severe. Had those storms tracked slightly differently or made landfall at different locations along the coastline, significantly greater effects would have been experienced in Delaware, including higher winds and more severe flooding.

Myth 3: “If a disaster occurs, it won’t be that bad.”

When a coastal storm or flood event occurs, the damage can be devastating. In 2003 during Tropical Storm Henri, more than 10 inches of rain fell during a five-hour period, resulting in extreme floods and property damage in New Castle County. Although Irene was only a Category 1 hurricane when it made landfall, more than 10 inches of rain fell in Kent and Sussex counties, and most areas in New Castle County received 6 to 7 inches. In 1962, a March northeaster resulted in seven deaths and cost more than \$50 million in public and private property damage.

Myth 4: “I don’t live near the coast, so I am safe.”

In fact, the vast majority of damage or destruction during recent tropical systems was caused by inland flooding associated with extreme rainfall. Significant inland flooding occurred with hurricanes Donna (1960), Agnes (1972), Gloria (1985), Floyd (1999), and Irene (2011), as well as tropical storms Henri (2003) and Jeanne (2004). Powerful thunderstorm and wind events can cause widespread damage in all areas of Delaware. Therefore, all homeowners should prepare—not just those who live along the coast.

Myth 5: “Even if I install hurricane clips, my home could be damaged.”

Even though someone may wear a seat belt, shoulder belt, and have an airbag, there is no guarantee that person won’t be injured in a major auto accident. Yet most people recognize the importance of these safety devices in reducing risk and use them. Likewise, the measures discussed in this handbook could significantly reduce risk, although there are no guarantees there will be no damage.

Myth 6: “If my home or property is damaged by a natural hazard event, government programs will provide assistance.”

After major disasters, many homeowners find that the government may not repair their damaged houses or even provide adequate compensation for





property damage. Government compensation evaluations are conducted after a disaster strikes and are based on the amount of damage that occurs on a county-wide basis. It is up to you to plan properly, strengthen your house, and have the appropriate financial protections in place such as insurance, if it is available. After a natural disaster occurs, the government may also be overwhelmed by the number of people in need and help may not arrive quickly.

Myth 7: “My house survived hurricanes Isabel and Irene, so I do not need to retrofit for hurricanes.”

When another massive natural disaster occurs, the resulting damage could be much greater. Neither Isabel nor Irene were coastal flood or wind-design events—that is, coastal flood levels were less than 100-year levels, and wind speeds were well below coastal building code design-level wind speeds. Homeowners in coastal Delaware should consider retrofits that provide window protection and a continuous load-path connection, which will help protect homes against both hurricanes and tornadoes. Additional simple measures are also possible.

Myth 8: “If a natural hazard event occurs, there is nothing I can do.”



Fortunately, there are many small steps you can take to significantly reduce the risk of damage to life and property. While it is not possible to eliminate all risk or damage, taking steps to plan and prepare can make a major difference and determine whether your house survives and receives minor or no damage. Thus, the information in this handbook covers two major parts for preparation: (1) protecting yourself and your family and (2) protecting your property.

Myth 9: “Strengthening my house is too expensive and not worth the effort.”

There are several relatively inexpensive ways to strengthen your house:

- Hurricane clips or window coverings can range from a couple hundred dollars to a few thousand dollars. This alone offers significant protection.
- For minimal costs, the roof structure (trusses and rafters) for many houses can be strengthened with bracing.

- Strengthening your roof can be expensive if done by itself. However, if it is done when you replace your roof at the end of its normal life, the incremental cost is reasonable.
- Foundation upgrades can be expensive, but considering your house is probably your major investment, it could be worth the immediate cost.

Strengthening your house can protect you from coastal storms, floods, and tornadoes. Ultimately, strengthening your house should be considered a home improvement that adds value to your house and is worth the effort, even without external incentives. The time and money spent to prepare your house are a very small fraction of the resources that may be needed if you fail to minimize damage when a natural hazard strikes.

In addition, by strengthening your house you protect your neighbors as well as yourself. A house that falls apart during a hurricane will create debris that can damage adjacent properties. You also help the emergency efforts of the local, state, and federal governments by being able to assist other people instead of requiring help yourself.

By preparing and strengthening your house, you are more likely to “weather the storm” and be better able to take care of family members, including the elderly, those with special needs, and pets. However, keep in mind that even if your fortified house is capable of withstanding a storm, you should still evacuate if the neighborhood you live in will become inaccessible due to deep floodwaters. Always follow evacuation instructions issued by your local/state emergency management officials.

1.2 THINGS YOU CAN DO TO PREPARE

There are some things you can do to prepare that will provide greater protection to your family and your property. They are summarized below with more detail provided later in this handbook.

Gather emergency supplies

You can gather emergency supplies in your house now. Check and restock each month so that the supplies are complete, not outdated or used. Avoid rushing to a store during an emergency to gather your supplies. There will likely be long lines and empty shelves—you will add to the crowd and





confusion. The good news is many items you need are probably already in your home (see Part 3 of this book).

Compile an evacuation kit

If your evacuation plans include using a public shelter for a coastal storm or flood, you will need an evacuation kit that contains clothing, medications, personal hygiene products, and other items such as bedding for five to seven days. Water and food are provided at shelters, but if a special diet is required, you should bring these foods with you. The kit should already be assembled and checked before hurricane season (see Part 3). If the kit will be used during evacuation for other hazards, three days of supplies may suffice. Don't forget to plan for your pet and prepare a pet evacuation kit (see Part 3 and Appendix B).

Create an evacuation plan for both a flood and a coastal storm



They are different. For a tropical storm or strong northeaster, your plan may include sheltering in a structurally fortified house if it is outside the high-risk flood zone or any evacuation zone. If you can't use your house, use a suitable alternative structure (a friend's or relative's house) or a shelter that is officially open (listen to local radio and television or go to redcross.org and click on "find a shelter;" see Part 3). For a flood, evacuate to high ground outside the evacuation zone if you are instructed by emergency management officials to do so. In any event, do not drive through high water—"turn around, don't drown." Discuss and practice drills of your evacuation plan with your family each year.

Know your property and take appropriate action



Look at where you are located. If the land has flooded in the past or is shown to be in a special flood hazard area on Federal Emergency Management Agency (FEMA) flood maps, you should consider flood insurance. If trees overhang your house, you should consider trimming or cutting branches that may damage your house in a storm. If your property is near a ridge, open land, or water, it may be especially susceptible to wind damage during a storm or hurricane (see Part 4).

Know your house and take appropriate action

When was your house built? Does it have connectors that tie the roof to the walls or the walls to the foundation? When will you need to replace the roof? Look at your blueprints. They may be available from your homebuilder, your local building department, or your architect (see Part 4).

Strengthen your house

A recently built house should have hurricane clips to tie the roof to walls and should also have strong connectors from the walls to the foundation. If you have an old home, you can retrofit at a reasonable cost. All households should consider the many options now available to protect your windows, garage, and doors. You can also strengthen your roof when it is time to replace it. The steps a homeowner can take will vary with each house, but for the majority of homeowners, there are a few steps that can make a significant difference (see Part 4).

Finance creatively

Consider efforts to strengthen your house as an important home-improvement project. Most projects are not that expensive. It is a great investment to strengthen your house and provide more protection to your family (see Part 4).

Seek the assistance of a qualified, licensed architect, structural engineer, or contractor

This handbook covers work that you may be able to do yourself. If you cannot do the work, seek qualified assistance through trusted references from friends and family, the Delaware Professional Engineering Society, or contractors' associations. Even if you do the work yourself, it is always best to seek professional advice for initial guidance since every house is a little different (see Part 4). If you are located in Sussex County's high-wind region, you should seek professional advice for how to secure your home from high wind damage. Remember to obtain all required local, county, and state permits and approvals before any work is initiated.



Don't gamble with your house

Obtain adequate insurance if you are in a flood-prone area (see Part 5). Remember that flood insurance coverage does not take effect until 30 days after purchase. Contact your insurance company or agent and verify that coverages are in place before a disaster strikes. Coverage may vary among insurance companies, so communicate with your insurance agent specifically about your policy and what is covered. Renters should remember that they should purchase their own renter's insurance. The Delaware Department of Insurance suggests that you prepare for severe weather disasters by creating a home inventory. A proper home inventory will create a record of what you own and what it is worth.



Part 2

Natural Hazards: An Overview for Homeowners

In Delaware, many different types of natural hazards can occur, including coastal storms, flooding, tornadoes, severe thunderstorms, drought/extreme heat, wildfire, earthquakes, and even tsunamis. This handbook concentrates on the most likely and potentially devastating hazards in Delaware with regard to loss of life and property damage: coastal storms, floods, and tornadoes.

Preparing for these larger hazard events will offer protection from the smaller, more frequent events. There is much more information on these hazards than can be provided in this handbook. Included here is only basic information that may play a role in how you, as a homeowner, can prepare for these hazards.

2.1 COASTAL STORM HAZARDS

There are two common coastal storm hazards in Delaware: hurricanes and northeasters.

2.1.1 HURRICANES—TROPICAL SYSTEMS

Hurricanes and tropical systems have tracked over or have passed close to Mid-Atlantic states many times in the past, with a recent example of a hurricane directly affecting Delaware occurring in August 2011 (Figure 2-1). A hurricane is an intense tropical weather system with a well-defined circulation pattern and maximum sustained winds of 74 miles per hour (mph) or more. A tropical storm is also an organized weather system with well-defined circulation, but its maximum sustained winds are lower—between 39 and 73 mph. A tropical depression is a low-level circulation system of persistent clouds and thunderstorms with maximum sustained winds of 38 mph or less. While far less powerful than hurricanes, tropical storms and tropical depressions can cause substantial damage. As a hurricane weakens and dissipates, it may revert to a tropical storm and eventually a tropical depression.





Figure 2-1. NASA satellite image of Hurricane Irene in August 2011. The bands of strong winds, rain, and storm surge spread from Florida to New England. Image courtesy of NASA

Hurricane strength is often given in categories using the Saffir-Simpson Hurricane Wind Scale,^{2,1} which rates hurricanes from 1 to 5 based on the intensity of the sustained winds. Table 2-1 shows expected wind-related damage from the different hurricane categories. It is important to note that the Saffir-Simpson Scale only illustrates the “sustained winds” of a hurricane. Wind gusts can reach up to 135 mph for a Category 2 storm and 160 mph for a Category 3 storm.

Hurricanes may also produce tornadoes that add to their destructive power. During a hurricane, there is a triple threat of damage from high winds, storm surge, and flooding associated with heavy rains.

Storm surge (Figure 2-2) is a large dome of water, often 50 to 100 miles wide, that sweeps ashore near where a hurricane strikes land. Storm surge typically accounts for 90 percent of storm-related deaths. A surge height of 10 feet or more can cause severe flooding far inland and cause severe damage along the coast, particularly when storm surge coincides with high tide.

Table 2-1. 2012 Saffir-Simpson Hurricane Wind Scale^{2,1}

Category	Sustained Wind Speed	Types of Damage Expected Due to Hurricane Winds
1	74-95 mph	Very dangerous winds will produce some damage: Well-constructed frame homes could have damage to roof, shingles, vinyl siding, and gutters. Large branches of trees will snap and shallowly rooted trees may topple. Extensive damage to power lines and poles likely will result in power outages that could last a few to several days.
2	96-110 mph	Extremely dangerous winds will cause extensive damage: Well-constructed frame homes could sustain major roof and siding damage. Many shallowly rooted trees will be snapped or uprooted and block numerous roads. Near-total power loss is expected with outages that could last from several days to weeks.
3	111-129 mph	Devastating damage will occur: Well-built framed homes may incur major damage or removal of roof decking and gable ends. Many trees will be snapped or uprooted, blocking numerous roads. Electricity and water will be unavailable for several days to weeks after the storm passes.
4	130-156 mph	Catastrophic damage will occur: Well-built framed homes can sustain severe damage with loss of most of the roof structure and/or some exterior walls. Most trees will be snapped or uprooted and power poles downed. Fallen trees and power poles will isolate residential areas. Power outages will last weeks to possibly months. Most of the area will be uninhabitable for weeks or months.
5	≥157 mph	Catastrophic damage will occur: A high percentage of framed homes will be destroyed, with total roof failure and wall collapse. Fallen trees and power poles will isolate residential areas. Power outages will last for weeks to possibly months. Most of the area will be uninhabitable for weeks or months.

Source: NOAA's National Weather Service website



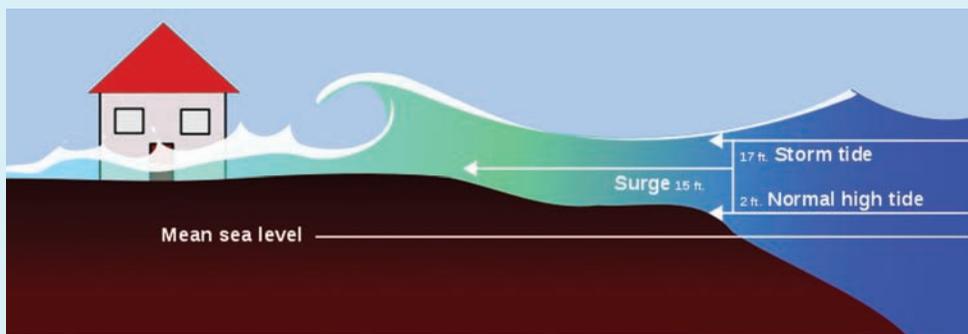


Figure 2-2. Storm surge depiction. Image courtesy of NOAA

Rainfall totals of 10 inches or more are common when a tropical storm or hurricane moves across a coastal location. Rainfall totals of this magnitude can result in destructive flash flooding near streams and rivers. Flooding also causes extensive property damage and agricultural losses. Torrential rains continue in upland areas long after the high winds of a hurricane diminish.

A common misperception is that a hurricane or other tropical system will only impact Delaware's immediate coast, and therefore, inland residents do not need to prepare. However, records show that all areas of Delaware are vulnerable to potentially devastating impacts of tropical storm force winds, torrential rains and associated flooding, and potentially deadly tornadoes.

A review of Delaware's tropical system history clearly illustrates the need for all of Delaware to prepare. The Hurricane of 1878 ranks among the state's most destructive wind storms. Its winds destroyed 100 roofs in Wilmington and caused damage throughout the state. Flooding washed out railroads, roads, and bridges. The associated storm surge reportedly caused flooding more than a mile inland along the Delaware Bay shoreline. In Delaware alone, 18 deaths are attributed to the devastating Hurricane of 1878.^{2,2}

In August of 1933 and 1944, hurricane-force winds, storm surge, and torrential rainfall impacted both coastal and inland portions of Delaware. Heavy rains and persistent gales caused inland flooding and uprooted thousands of trees. More than 13 inches of rain was recorded at Bridgeville over a three-day period in August 1933. Hurricanes Hazel (October 1954), Donna (September 1960), and Gloria (September 1985) also brought hurricane-force wind gusts to Delaware.



Figure 2-3. Torrential rainfall associated with Tropical Storm Henri resulted in extensive flooding in New Castle County in 2003. Image courtesy of Delaware DNREC

In September 1999, Tropical Storm Floyd’s eye tracked over southeastern Delaware, resulting in torrential rainfall throughout western portions of the state, exceeding 10 inches in some places. Associated flooding caused record-breaking river levels across the state—hundreds of roads, railroad lines, and bridges were closed or destroyed. Winds uprooted hundreds of trees, leaving 25,000 homes and businesses without power for three days. Most of the damage and destruction occurred in New Castle County, with only minor beach erosion and minimal damage near the ocean.

Two tropical systems exerted major impacts to Delaware in September 2003, resulting in presidential disaster declarations. Tropical Storm Henri produced heavy rainfall (exceeding 9 inches in a 24-hour period) and associated flooding damaged hundreds of houses, trapped motorists in submerged vehicles, flooded roadways, and destroyed bridges in New Castle County (Figure 2-3). Hurricane Isabel caused beach erosion and overwash along the Delaware coast. Wind gusts of up to 70 mph knocked down many trees and power lines, causing significant power outages throughout the state.





Figure 2-4. Storm surge and waves caused damage to properties along the Delaware Bay coast in 2006. Image courtesy of Delaware DNREC

In September 2004, remnants of Hurricane Jeanne produced heavy rainfall, raising river water levels and flooding roadways throughout the northern portion of the state. The storm also spawned a tornado in northern New Castle County. The tornado's 5-mile path of destruction included the New Castle Airport, where five people were injured and numerous planes and buildings damaged.

Strong winds associated with Tropical Storm Ernesto (September 2006) caused tree and power line damage, leaving approximately 151,000 homes without power. Storm surge and wave impacts also resulted in beach erosion and overwash along the coast (Figure 2-4).

Hurricane Irene (August 2011) brought hurricane-force winds and heavy rain throughout the state, with a tornado in Lewes destroying one home and causing damage to 50 others. Two fatalities were attributed to the storm.

Although only three storms (hurricanes of 1878 and 1903 and Hurricane Irene) have brought hurricane-strength winds to Delaware, it is clear that any type of tropical system can cause widespread damage and destruction

throughout the state. Thus, it is very important for all Delaware residents to be fully prepared.

2.1.2 NORTHEASTERS—EXTRATROPICAL STORMS

While not as powerful in terms of wind speeds as hurricanes, northeasters (also called nor'easters) occur more frequently in Delaware. Because they cover a larger area and are typically slow-moving storms, northeasters usually affect a large portion of the coast and exert significant impacts on beaches, dunes, buildings, and roads over several successive tides. Northeasters are most damaging when they stall off the coast.

Northeasters are a year-round threat to Delaware but occur more frequently during winter and spring months. These intense storms move along the coast with winds blowing directly from the northeast, right off the Atlantic Ocean onto the shoreline. They develop around regions of low pressure and derive their energy from the strong temperature gradients that commonly occur when cold and warm fronts collide.

Northeasters typically produce winds ranging from 30 to 40 mph, with gusts that can exceed 74 mph. These strong winds can create waves ranging from 5 to 15 feet high, depending on the storm's duration and location relative to the shoreline. The size and strength of these waves can erode beaches and dunes and demolish buildings, boardwalks, and roads. Tidal flooding is also a serious hazard associated with northeasters. Storm-tide heights of 3 to 10 feet above normal are especially damaging when they bracket several tidal cycles. The torrential rainfall from northeasters can cause extensive flooding in both coastal and inland areas.

The most-damaging coastal storm to impact Delaware was a northeaster that occurred in March 1962 (Figure 2-5). The March (Ash Wednesday) 1962 storm was extremely severe because it stalled off the Delaware coast for more than three days and coincided with the highest monthly astronomical tides through five successive high-tide cycles. The extreme storm surge combined with strong northeast winds and wind-driven waves to produce a record high tide of 9.22 feet above mean lower low water (mllw) registered at the Lewes Breakwater Harbor tide gauge. The maximum tide height recorded during the 1962 storm is still the highest tide of record in Delaware.





Figure 2-5. The March 1962 northeaster caused significant damage to property in Delaware, especially along the coastlines of the Inland Bays, Delaware Bay, and Atlantic Ocean. Image courtesy of Delaware Public Archives

Of the 20 highest tide levels recorded at the Lewes Breakwater Harbor tide gauge (Delaware Bay) over the past 75 years, 15 (75 percent) are associated with northeasters.^{2,3} Eleven of these top 20 northeaster “high tide of record” coastal storms occurred in the 1990s or 2000s; a few of these are described below.

On January 4, 1992, the Delaware coast was hit by a northeaster that produced a tide of 8.75 feet (mllw), the second-highest tide recorded at Breakwater Harbor (Lewes). Significant beach erosion occurred along Delaware’s Atlantic Ocean coast. Dunes were breached and there was severe flooding and property damage from Rehoboth Beach to Fenwick Island.

Back-to-back northeasters occurred in January and February 1998, producing heavy rains, high winds, waves, and extreme tides. The high tide during the

January storm was 8.68 feet (mllw) at the Breakwater Harbor tide gauge (4.3 feet above normal). Wind gusts exceeded hurricane strength (>80 mph) in the vicinity of Indian River Inlet and gusts reached 70 mph at the Lewes Pilot Tower. One week later, in February 1998, another severe northeaster pounded Delaware's coast with tides of 8.49 feet (mllw). The cumulative effect of two severe coastal storms hitting the coast within a week was devastating to all coastal areas, causing eroded beaches and dunes, flooding, overwash, and property damage. About 10,000 homes and businesses in the state lost power, primarily in Sussex County, although no serious injuries were reported. Damage estimates were approximately \$1.3 million for the January storm and \$1.7 million for the February storm.

In May 2008, a severe northeaster impacted the entire Delaware coastline. Extreme tides along Delaware Bay beaches caused water to overtop dunes and flood adjacent roadways and communities. Many Delaware Bay residents woke to find their homes surrounded by water. Most of the flooding was caused by rising waters flooding from the marsh side of communities along the bay coast. The Murderkill River reached a flood level of 8.5 feet above mllw, setting a new tidal record. Winds peaked at 68 mph as recorded in Lewes where the Breakwater Harbor tide gauge recorded a maximum tide height of 7.89 feet. Storm duration was two days through four tide cycles, and many Delaware Bay beach residents compare this storm to the March 1962 storm. Along the Atlantic Ocean coast, beaches and dunes were eroded, but little or no flooding occurred on the landward side of the beaches.

In mid-November 2009, the remnants of Tropical Storm Ida developed into a northeaster that impacted Delaware over a period of three days and six tide cycles. Not only did the entire coast experience significant beach erosion, but ocean and bay waters broke through the dunes in several areas (Figure 2-6). Portions of Route 1 north of Indian River Inlet were covered by water and sand, requiring the Delaware Department of Transportation (DelDOT) and Delaware Department of Natural Resources and Environmental Control (DNREC) to clear the road and rebuild dunes on the east side of the highway.





Figure 2-6. High tides and surf break through dunes along Delaware’s ocean coast during a November 2009 northeaster. Image courtesy of Delaware Sea Grant

2.2 FLOOD HAZARDS

Flooding is probably the most common natural hazard in Delaware. Flooding can be caused not only by a hurricane, but also by a tropical storm, tropical depression, northeaster, or any other weather system that produces heavy rain. Flooding can build up gradually over a period of days or suddenly in a few minutes (commonly known as a flash flood). Coastal flooding can result from high tides (usually on either side of a new or full moon), storm surge, and waves generated by storms located hundreds or thousands of miles from Delaware.

Flooding can be associated with living near a body of water such as an ocean, stream, river, or reservoir. To determine whether you are in a high-risk flood area, look at the Federal Emergency Management Agency’s (FEMA) Flood Insurance Rate Maps (FIRMs). These maps show what areas are susceptible to flooding and high velocity wave action (for those near coastal areas) from a 1 percent annual chance event (a.k.a. 100-year flood). Electronic copies of the maps can be downloaded from FEMA’s Map Service Center (msc.fema.gov).

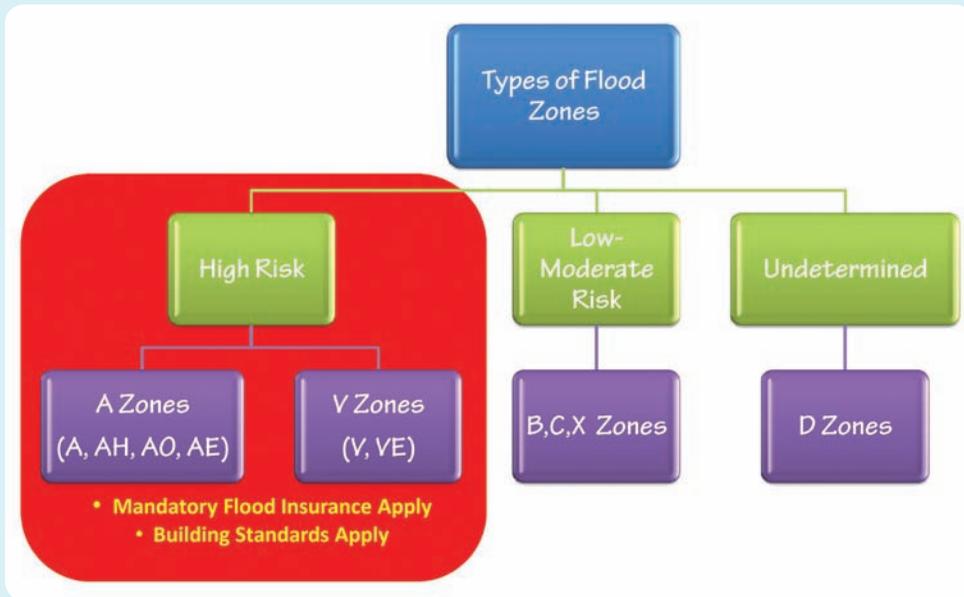


Figure 2-7. High Risk Flood Zones are in the Special Flood Hazard Area (subject to inundation by the 1 percent annual chance flood or 100-year flood). They consist of flooding (A zones) and high-velocity wave action (V zones) near the coast. In addition, there are areas of low-moderate risk (B, C, X zones) and areas where the risk is undetermined (D zones). Even in these zones, the homeowner should consider flood insurance if there are localized flooding or drainage conditions on their property as indicated by past weather or storm events. Image courtesy of Hawai'i Department of Land and Natural Resources

DNREC maintains the Environmental Navigator, a map viewer tool that is capable of displaying the current effective Digital Flood Insurance Rate Maps (DFIRM) for Delaware. Copies of the maps may also be available for viewing at your city or county building departments.

Flood Zones are geographic areas that FEMA has defined according to varying levels of flood risk. They are depicted on a community's FIRM and each zone reflects the flood risk severity or type of flooding in the area. Generally, these zones can be identified as one of three risk classifications (see Figure 2-7).

Even if you are not in a high-risk flood zone, you may nonetheless be at risk from flooding. According to FEMA, nearly 20 percent of flood insurance



With 3' Freeboard



Without Freeboard



Figure 2-8. In this example, adding a small amount of height has very little effect on the look of a home, but results in a substantial flood insurance savings.²⁴ Image courtesy of Dan Gihring for StormSmart.org

claims come from low-to-moderate risk areas. Go to floodsmart.gov and type in your street address to determine a very general estimate of the flood risk for your property.

A good way to determine the risk of flooding for your house is to observe and study your property, looking for potential nearby sources of flooding or blockages of surface flow. If your property is immediately adjacent to a road or drainage ditch, try to evaluate the potential for water to accumulate in the ditch due to blocked culverts. If the crown of the nearby road is higher than your driveway or crawlspace, this may be an indication that heavy rainfall runoff could accumulate on your property, regardless of whether you are in a mapped floodplain.

Even inland properties may be susceptible to flooding if there is poor localized drainage or if recent development has altered the ability of water to drain out of your area. If your property floods during small rain events, then the problem will be greater during a severe storm or hurricane. You can protect yourself by improving the local drainage, making your house resistant to floods, and purchasing flood insurance. You do not need to be in a high-risk flood zone to obtain flood insurance.

For those located within a flood zone, elevating a building's lowest floor above predicted flood elevations by a small additional height (known as "freeboard") has very little effect on the look of a home, yet it can lead to substantial reductions in damages caused by flooding as well as reductions in flood insurance cost (Figure 2-8). Consult with your local floodplain

manager to determine how much freeboard (if any) is needed for your property for flood insurance savings.

Even if you are not in a flood zone, you should consider purchasing flood insurance, especially as properties located outside of an official flood zone might also be at risk from flooding. The rates for properties outside declared flood zones are very affordable and are invaluable if a flood event should occur.

2.3 TORNADO HAZARDS

One of nature's most violent storms, a tornado is characterized by a twisting, funnel-shaped cloud extending to and in contact with the ground. Tornadoes most often result from the intersection and interaction of cool dry air as it overrides warm moist air, causing the warm air to rise rapidly. These conditions are also associated with severe thunderstorm activity, so it follows that tornadoes are most often generated by thunderstorms (including those associated with tropical systems such as hurricanes).

With wind speeds ranging from 40 to more than 300 mph, tornadoes can cause fatalities and devastate a neighborhood in seconds. The result is catastrophic failure of structures and facilities, as well as the potential for injury and death. Damage paths can be in excess of 1 mile wide and 50 miles long.^{2,5}

The size of a tornado is not necessarily an indication of its intensity; large tornadoes can be weak and small tornadoes can be violent. The Fujita (F) Scale is used to estimate tornado wind speeds based on damage left behind by a tornado. An Enhanced Fujita (EF) Scale (Table 2-2), developed by a forum of nationally renowned meteorologists and wind engineers, makes improvements to and replaces the original F scale.^{2,6}

While tornadoes are most frequently reported east of the Rocky Mountains during spring and summer months, peak tornado season in Delaware is March through May. They are most likely to occur between the hours of 3 and 9 p.m., but can occur at any time.

Tornadoes generally occur near the trailing edge of a thunderstorm or accompany a tropical storm or hurricane as it moves onshore (Figures 2-9 and 2-10). The average forward speed of a tornado is 30 mph but may vary



Table 2-2. The EF Scale^{2,6}

EF-Scale Number	Class	Wind Speed	Description
EF0	Weak	65 - 85 mph	Gale: Some damage to chimneys; breaks branches off trees; damages sign boards.
EF1	Weak	86 - 110 mph	Moderate: Peels surface off roofs; mobile homes pushed off foundations or overturned; moving autos pushed off the roads; attached garages may be destroyed.
EF2	Strong	111 - 135 mph	Significant: Considerable damage. Roofs torn off frame houses; mobile homes demolished; boxcars pushed over; large trees snapped or uprooted; light object missiles generated.
EF3	Strong	136 - 165 mph	Severe: Roof and some walls torn off well-constructed houses; trains overturned; most trees in forest uprooted.
EF4	Violent	166 - 200 mph	Devastating: Well-constructed houses leveled; structures with weak foundations blown off some distance; cars thrown and large missiles generated.
EF5	Violent	>200 mph	Incredible: Strong frame houses lifted off foundations and carried considerable distances to disintegrate; automobile-sized missiles fly through the air in excess of 100 meters; trees debarked; steel reinforced concrete structures badly damaged.

from stationary to 70 mph.^{2,5} Before a tornado hits, the wind may die down and the air may become very still. A cloud of debris can mark the location of a tornado even if a funnel is not visible. It is not uncommon to see clear, sunlit skies behind a tornado.^{2,5}

Waterspouts are tornadoes that form over water. In June 2012, a waterspout observed in Rehoboth Bay—associated with a severe thunderstorm with 65 mph winds—damaged property in Dewey Beach and Angola.



Figures 2-9 and 2-10.

In August 2011, a tornado generated by Hurricane Irene resulted in property damage in Lewes, Del. Images courtesy of Delaware Sea Grant

The entire state of Delaware is at nearly equal risk for tornadoes. In September 2012, an EF-0 tornado touched down in a Kent County neighborhood, causing widespread damage that left six homes uninhabitable and 24 properties damaged overall (Figure 2-11). With a maximum wind speed estimated to be 85 mph, the tornado cut a destructive swath through an area approximately 35 yards wide and 215 yards long.^{2,7}

It is prudent for homeowners to consider some of the things that may place them and their property at higher risk, including:

- improperly maintained or potentially damaging trees;
- nearby high-risk structures, which might produce windborne debris such as abandoned out-buildings or buildings with improperly connected flat roofs;
- lightning damage due to improper grounding; and
- failure to monitor and heed tornado warnings.

The Tornado History Project^{2,8} reports that from July 1954 through August 2011, tornadoes in Delaware ranged in intensity from F0 to F3 and resulted





Figure 2-11. In September 2012, an EF-0 tornado with estimated maximum wind speeds of 85 mph caused structural damage in Kent County, Del. Image courtesy of Kent County Office of Emergency Management

in 87 injuries and three fatalities. Over that 67-year time period, tornadoes struck all three Delaware counties: 22 in New Castle County, 17 in Kent County, and 21 in Sussex County.^{2,8}

2.4 ADDITIONAL HAZARDS

SEVERE THUNDERSTORMS

Although thunderstorms typically impact a small area, they can be extremely dangerous due to their capability of generating tornadoes, hail, strong winds, flash floods, and damaging lightning. These storms can move through an area very quickly or linger for several hours, with longer duration resulting in the possibility of excessive precipitation and increased likelihood of flash floods. The National Weather Service considers a thunderstorm to be severe



if it produces hail at least one inch in diameter, winds of 58 mph or stronger, or a tornado. Straight-line winds associated with severe thunderstorms can exceed 125 mph and are responsible for most thunderstorm damage.

Straight-line winds, or downbursts, are much more common than tornadoes and tend to cause more damage than the typical tornado in Delaware. In August 2012, severe thunderstorms accompanied by straight-line winds estimated at 60 mph ripped through homes and property in Sussex County. Roofs were lifted from homes, and many properties were damaged or destroyed (Figure 2-12). Heavy rains associated with the storms caused flooding in low-lying areas.

DROUGHT/EXTREME HEAT

Drought conditions are the result of extended periods of limited precipitation. Human activities, high temperatures, high winds, and low humidity can exacerbate drought conditions and may also make areas more susceptible to wildfire. Periods of drought can have significant negative impacts on agriculture, water reservoir levels, surface and groundwater supplies, or any water-dependent resource or product. An extreme heat condition is commonly identified when prolonged temperatures are greater than or equal to 10 degrees above the average high temperature for a region. Periods of extreme heat in Delaware are also often accompanied by high humidity. Extreme heat can cause medical problems and pose significant risks to humans, especially the elderly, young children, and people with respiratory difficulties.

WILDFIRE

Wildfires, or any naturally occurring fire in a grassland, brush, or forested area, are especially dangerous hazards during periods of drought. The most common cause of wildfires is negligent human behavior (causing 80 percent of forest fires). Lightning strikes are the second most common cause and typically occur during summer months. Areas with large amounts of dry fuel, such as vegetation, debris, or trees, are particularly susceptible to wildfires caused by lightning strikes. Fire probability depends on local weather conditions, human activity, and implementation of community fire prevention measures.





Figure 2-12. In August 2012, winds associated with severe thunderstorms damaged property and scattered debris in the Long Neck area of Sussex County. Image courtesy of Ron MacArthur/Cape Gazette

EARTHQUAKES

Every year approximately 3 million earthquakes occur worldwide. Between 2000 and 2009, the United States experienced approximately 32,000 earthquakes; six were considered major and occurred in either Alaska or California. Earthquakes do not occur exclusively in the western United States. Seven events with magnitudes greater than 6.0 have occurred in the central and eastern sections of the United States since 1811. The largest event occurring in Delaware happened in 1871 and had an estimated magnitude of 4.1. The largest recorded event in Delaware occurred in 1973 and had an estimated magnitude of 3.8. In August 2011, a magnitude 5.8 quake, centered in Virginia, was felt from northernmost New Castle County to coastal and inland Sussex County. Many Delaware residents reported moderate building shaking and movement or shaking of furniture. In 1997, Delaware was reclassified from being a low seismic risk state to being a medium seismic risk state by FEMA and the U.S. Geological Survey.

TSUNAMIS

While tsunamis are not considered to be a high-risk hazard in Delaware, it is possible that a tsunami could impact the Delaware coast. Tsunamis in the Atlantic Basin are most commonly generated by earthquakes and landslides. Primary sources of tsunami-producing earthquakes in the Atlantic are located near Puerto Rico, Portugal, and the Canary Islands. Tsunamis in the Atlantic Ocean may also be caused by underwater landslides, usually occurring near the continental shelf and slope. Since 1600, 40 tsunamis and tsunami-type waves have been documented in the eastern United States. East Coast tide gauges can detect even small tsunami waves caused by distant earthquakes. For example, Atlantic basin gauges recorded 5 to 10 inch waves generated by the December 2004 Indian Ocean tsunami.





Part 3

Protecting Yourself and Your Family

This part of the handbook covers the topic of protecting yourself and your family from natural hazards. In particular, it is important that your household has a stock of emergency supplies, an evacuation kit, and evacuation plans for several types of hazards, including floods, coastal storms (hurricanes and/or northeasters), and severe wind events such as tornadoes. Your response may differ depending on the nature of the threat. You should discuss and practice the evacuation plan with your family once a year or whenever there is a major lifestyle change (for example, when a member of the family goes to a new school or is working in a different location).

3.1 EMERGENCY SUPPLIES

A general rule of thumb when preparing for a hazard event is to remember to be self-sustaining for the first 72 hours (three days) after a hazard event. Due to a lack of access or availability, basic supplies may be unobtainable, so it might be wise to have supplies for three to five days depending on the type and extent of the disaster event. Therefore, a stock of emergency supplies will be helpful during a major event like a hurricane, tropical storm, or northeaster, as well as for a minor event like a simple power outage. The importance of these supplies has been demonstrated during several recent storms—Hurricane Irene in 2011, the winter 2010 snowstorms, and tropical systems Isabel and Henri in 2003. These storms knocked out power for multiple days in many areas in Delaware.

Your emergency supplies should be gathered as soon as possible and checked monthly to ensure that they are complete, unused, and fresh (mark and check expiration dates). Old food and water should be used or discarded and replaced with fresh supplies. Do not keep expired supplies. Your supplies should include at least the following:

- Portable radio, flashlight, and extra batteries (or flashlight and radio with hand-crank rechargeable batteries)
- NOAA weather radio

- First-aid kit
- List and supply of special medications (prescriptions and others)
- Three-day supply of nonperishable foods
- Hibachi with charcoal, camping stove with fuel, or barbeque grill with propane. Do not use these items indoors or in an area with no ventilation. Follow all manufacturer instructions.
- Manual can opener
- Matches or lighter
- Disposable plates and kitchen utensils
- Supply of water—A reasonable estimate is one gallon per person per day for drinking, cooking, and personal hygiene needs. It is important to have available good water containers for any water-interruption situations. Four- to six-gallon water containers are readily available in stores. Larger containers that sit in a bath tub and can be used to store up to 100 gallons of potable water are also available. Remember to store water for toilet use (in bathtubs, rubbish containers, washing machines, water heater, etc.).
- Pet supplies (food, water, bedding, leash, medications)

Additional items you may want to add to your stock include:

- Sanitary supplies and/or a portable toilet
- Spare cash—Automated teller machines require electricity to operate and may not be available or accessible for weeks.
- Waterproof plastic sheeting or tarp, string or rope, and duct tape
- Cell phone with a car charger and a hardwired single line phone—Cell phone networks may be overloaded during times of natural hazards. Cordless phones with a base station will not work without electricity. If you need to rely on cordless phones, get an alternate source of power. Otherwise, have an old-fashioned corded phone. Use your phone only in an emergency during a natural hazard event.
- Bedding and clothing for each person



- Blankets and towels
- Rain jackets and pants
- Sunscreen and bug repellent
- Baby supplies (diapers, food, medication)
- Toothbrush, toothpaste, soap, shampoo, cleanser, bleach, trash bags, towelettes, water-free hand disinfectant
- Copies of important documents—Driver’s license, social security card, proof of residence, insurance policies, wills, deeds, birth and marriage certificates, tax records, medical records, family pictures, etc.
- Alternate power supplies—During an emergency or power outage, alternative sources of power may be needed (among these are generators, inverters, power stations, and battery chargers). See Part 4 of this book for descriptions of alternative power sources that may supplement your emergency supplies.



Note that if you plan to take shelter in your home (outside the flood evacuation zone, well inland of the strongest winds of a hurricane, and in an exceptionally strong dwelling), you may wish to have more than five to seven days of supplies. There is always the possibility that

a major storm or hurricane can disrupt the supply line of goods. If space is available and your house is protected, stocking up for a two-week period is prudent. Gather supplies over a period of time rather than rushing out during an emergency when shortages are likely.

3.2 EVACUATION KIT

The evacuation kit differs from your stock of emergency supplies because the kit is what you will take if you need to leave your house in an emergency. Your evacuation kit should be prepared as soon as possible and can be

checked before the beginning of hurricane season, which runs June 1 to November 30. The components of the kit should be stored in one place, perhaps in a duffle bag or backpack, so that it is ready to go at a moment's notice. The kit is primarily for evacuation during a hurricane, although it could be used for other situations. It may include:

- One gallon potable water per day per person
- Personal items and family needs, such as a two-week supply of daily prescription medications, a three-day supply of nonperishable food and any special dietary foods, manual can opener, infant formula and diapers, prescription eyewear and personal hygiene items such as waterless cleaner, toothbrush, toothpaste, and toilet paper
- List of any required medications, special medical information, medical care directives, health insurance card, personal identification, and other important documents
- First-aid kit
- Flashlights, batteries, and spare bulbs
- Portable radio with spare batteries
- Change of clothes and towels
- Pillows, blankets, and folding mattresses/air mattresses

A general recommendation is that the evacuation kit should contain supplies for five to seven days. Should the supply chain be disrupted (because of damage to airports or warehouses, for example), you will be better off than others who do not have adequate supplies.

There is a fine line between bringing too many supplies that overload limited shelter space and not bringing enough. However, if you go to a shelter, keep in mind that there will be limited space, so bring only what is recommended unless you are instructed otherwise by your local emergency management agencies.

3.3 EVACUATION PLANNING

In Delaware, it is important for families to plan for various natural hazard events, including floods and coastal storms. When you put your evacuation plan together, here are some things to consider:





- Stay alert, stay calm, and be informed (tuning in to local radio and television is important). Create an evacuation plan and review it with your family every year.
- Evacuation procedures for a hurricane or coastal storm may differ from those of an inland flooding event. You must plan for both. In a hurricane or strong coastal storm, you must protect yourself from strong winds, torrential rain, and coastal inundation. In a flood, you must protect yourself from rising water.
- Delaware Department of Transportation (DelDOT) maintains a web resource (deldot.gov/information/projects/tmt/evac_map.shtml) to help citizens determine possible routes of evacuation during disaster. Evacuation maps may be updated at any time, so do not depend on outdated versions. In addition, the type of disaster may impact which evacuation route should be considered. It is important for citizens to be familiar with multiple evacuation routes and test them to see which best meets their needs. Individuals should also be mindful that bridge closures may be enforced during inclement weather, such as snow or high-wind conditions. DelDOT's Transportation Management Center provides real-time traveler information that includes updates on travel advisories, road closures, and restrictions (deldot.gov/information/travel_advisory/index.shtml). DelDOT's Traveler Advisory radio station (WTMC 1380 AM) is also available through the website.
- Listen to your local radio and television stations carefully as there may be additional or modified directions based on the type of disaster and best available information at that time. Mother Nature is unpredictable, and a team of scientists and emergency responders will always be monitoring unusual conditions for public safety. "Local" means radio and television broadcasts specific to the area in which you live. Television is important but because a station may broadcast over a larger area—including multiple states—the information provided may be more applicable to one area than another.
- Your evacuation plan should consider yourself, the members of your family, those with special health needs for whom you take responsibility (like the disabled or elderly), and your pets. Practice evacuation procedures with your family through yearly drills.

- In an evacuation or emergency situation, it is expected that all able-bodied persons (men, women, and children) should be able to take care of themselves if they act calmly and with proper direction. This is why it is important to practice your plan regularly.
- Parents should confirm with their child's school the evacuation plans that are in place, specifically, where the students will be held and for how long during each type of natural hazard. You should not have to drive to school to pick up your children.
- As part of your evacuation plan, consider how family members will communicate if they become separated. Each family member should have a list of telephone and cellular phone numbers and email addresses of everyone in the family and phone numbers of a few contacts outside of the family. This list should be readily accessible and not require power to access (e.g., not stored on a cell phone or computer).
- If needed, develop a plan to help those who cannot help themselves, such as the disabled or those with limited mobility. If people with special health needs are with a care provider, confirm that the care provider has an evacuation plan. Otherwise, you, your relatives, your friends, or a specified designee can take responsibility for that person.
- Develop a plan for your pets. Listen to local radio to determine if there are any pet-friendly shelter locations near you. Pets entering such shelters should be caged and owners must provide food, bowls, bedding, waste disposal bags, leash, and medication for their pets. If possible, take your pet with you to high ground outside of the evacuation zone. Detailed disaster preparedness information for pet owners is available from DEMA and Prepare Delaware: preparede.org/home/pets.
- If you are outside an inundation zone or flood zone and in a strong house that is located in a safe and appropriate location, you may be better able to store food and water and take care of your loved ones—including those with special health needs, the elderly, and your pets. This is why it is important to strengthen your home as much as possible. A strong house is built with connectors that tie the roof to the walls and the walls to the foundation (see Part 4). In addition,





the house should have coverings for windows that protect against wind pressure and impacts.

- In general, stay off the roads. Only drive if it is absolutely essential. The police may close many roads during an emergency, so people can exit a highway, but not necessarily get on it.
- Monitor official radio and television broadcasts for an updated list of refuge areas or shelters that may be open for a specific hazard event. Do not count on all shelters to be open. Immediately following a large disaster, suitable shelter sites will be selected from a pre-designated list based on the type of hazard, areas of need, and estimated numbers of displaced people. Therefore, it is not possible to say in advance with certainty which sites will actually operate as shelters. As soon as specific emergency shelter sites have been formally designated, this list will be announced through local media to the public. When shelters are open, the list will also be included on the American Red Cross website: redcross.org. If it is unsafe to shelter-in-place and you do not have an alternative, evacuate to a designated emergency shelter.
- Plan and prepare to be at your evacuation point for several hours or days. Plan for a minimum of 72 hours, but it would be wise to prepare to be self-sustaining for three to five days, depending on the type and extent of the disaster.
- Know the difference between a watch and a warning. Do not confuse the two (see Part 3.4 below). When each is triggered, there are different actions you and your family should take. Also note that state and local emergency management agencies may issue a mandatory evacuation.

3.4 KEY DEFINITIONS

Hurricane Watch. Sustained winds of 74 mph or higher are possible in the specified area of the watch, usually within 48 hours. During a watch, prepare your home and review your plan for evacuation in case a hurricane warning is issued. As discussed earlier, preliminary preparations should begin even before a watch has been issued.

Hurricane Warning. Sustained winds of 74 mph or higher are expected in the specified area of the warning, usually within 36 hours. Complete hurricane preparations and leave the threatened area if directed by officials.

Tropical Storm Watch. Winds of 39 to 73 mph or higher pose a possible threat, generally within 48 hours. These winds may be accompanied by storm surge, coastal flooding, and/or river flooding. During a watch, prepare your home and review your plan for evacuation in case a tropical storm warning is issued.

Tropical Storm Warning. Winds of 39 to 73 mph or higher associated with a tropical cyclone are expected in 36 hours or less. These winds may be accompanied by storm surge, coastal flooding, and/or river flooding.

Coastal Flood Advisory. Minor coastal flooding is occurring or imminent. Listen to the NOAA weather radio station or local radio stations or check your local television station for information.

Coastal Flood Watch. Moderate to major coastal flooding is possible. Such flooding would potentially pose a serious risk to life and property. Be prepared to move to higher ground—listen to the NOAA weather radio station or local radio stations or check your local television station for information.

Coastal Flood Warning. Moderate to major coastal flooding is occurring or imminent. This flooding will pose a serious risk to life and property. Take necessary precautions at once. If advised to evacuate to higher ground, do so immediately.

Flash Flood or Flood Watch. Flash flooding or flooding is possible within the designated watch area. Be prepared to move to higher ground—listen to the NOAA weather radio station or local radio stations or check your local television station for information.

Flash Flood or Flood Warning. Flash flooding or flooding has been reported or is imminent. Take necessary precautions at once. If advised to evacuate to higher ground, do so immediately.

Severe Thunderstorm Watch and Warning. A Severe Thunderstorm Watch is issued when severe thunderstorms are possible in and near the watch area. It does not mean that they will occur; it only means they are possible.





A Severe Thunderstorm Warning is issued when severe thunderstorms are occurring or imminent in the warning area. Severe thunderstorms are defined as having winds of 58 mph or higher and/or hail 1 inch in diameter or larger.

Tornado Watch and Warning. A Tornado Watch is issued when severe thunderstorms and tornadoes are possible in and near the watch area. It does not mean that they will occur; it only means they are possible. A Tornado Warning is issued when a tornado is imminent. When a Tornado Warning is issued, seek safe shelter immediately.

3.5 EMERGENCY NOTIFICATION SYSTEMS

If a situation or event becomes a potential threat to Delaware residents and visitors, the public will be alerted by one (or several) of the following methods, as appropriate:

Delaware Emergency Notification System. The Delaware Emergency Notification System (DENS) is the primary system for public warning and emergency protective action information. DENS serves the entire state and is fully operational for residents and businesses that have listed or unlisted telephone numbers. DENS allows emergency voice messages to be delivered to a person answering the phone or to an answering machine. It also bypasses “zapper” type phone devices that stop incoming computer-generated calls often used by telemarketers. In addition to the State Emergency Operations Center and the Delaware State Police Communications Center in Smyrna, activating points for the DENS include the primary emergency 911 centers in each county and Wilmington. DENS can provide emergency notification to the entire state or to an area as specifically defined as 10 houses on one street. Calls from DENS will include the name of the agency that activates the system, type of emergency, recommended protective actions (if any), and resources for obtaining additional information. Appropriate Emergency Alert System radio stations and television stations will also be provided in the message.

IMPORTANT: If you use a cell phone as your primary phone, you **MUST** contact First Call Interactive Network at 866-484-3264 or visit the First Call website (alertregistration.com/dema) to register for the DENS list. The registration line prompts callers through the registration process. There is no

cost to register. A street address is necessary for cell phone users, and only one phone number per address is permitted. The system has the capability to send text messages to registered cellular phones and in the future will be able to send text messages to all cell phones in an emergency area—registered or not.

Emergency Preparedness Voluntary Registry. The Emergency Preparedness Voluntary Registry is a database containing details on residents with special needs. It can be accessed by 911 call takers and distributed to first responders in case of an emergency. Information gathered from the registry site will be used to aid in planning for local and state emergencies. The information will also be used by emergency planners like those at DEMA when planning their response to events like hurricanes or other natural disasters.

Registry information will be shared with 911 personnel, fire, police, and emergency medical technician personnel and will be used by state and local emergency planners and first responders in times of crisis. First responders will have access to this information and will use it to better serve you should you need to dial 911.

You can submit your information for the registry online at de911assist.delaware.gov. It is important to note that:

- In an actual emergency, response agencies will try to provide the necessary assistance, but this cannot always be assured.
- To best guarantee personal safety, individuals should make plans and follow government instructions.
- If requested to relocate to an emergency shelter, a personal caregiver should accompany you if you should require specialized medical attention.

Emergency Alert System. The Emergency Alert System (EAS) is the official source of all hazard information and instruction in the state. EAS information can originate from county, state, or federal agencies. For example, the EAS network could disseminate warnings and/or instructions from the governor's office during threats or emergencies affecting one or more counties within the state. The statewide network may also be activated by the National Weather Service Forecast Office to disseminate weather- or tsunami-related watches or warnings.





If a siren sounds, turn on your radio. Some radios with the NOAA weather radio band turn on automatically when an emergency broadcast through the EAS is announced. This could be useful for homeowners along the coast. The NOAA weather radio station broadcasts round-the-clock weather and surf conditions and also participates in the EAS system.

All local radio stations have voluntarily agreed to participate in the EAS system. Additional information may also be available on local and cable television. There are also radio stations around Delaware that have a wide circulation and specialized equipment including decoders and backup generators for use during emergency situations. They are listed in Table 3-1.

Additional Emergency Alert Resources. There are other means of alerting individuals to emergency situations:

- NOAA All-Hazards Radio provides an excellent source of up-to-date, real-time emergency information.
- Police and fire department personnel may use loudspeakers and make door-to-door contacts.
- Local news media may provide up-to-date, real-time emergency information.

Table 3-1. Participating Radio Stations Broadcasting Emergency Situations

County	Radio Station
New Castle County	WDEL - AM 1150 KHz WSTW - FM 93.7 MHz WJBR - AM 1290 KHz WJBR - FM 99.5 MHz
Kent County	WDOV - AM 1410 KHz WRDX - FM 94.7 MHz WAFL - FM 97.7 MHz
Sussex County	WZBH - FM 93.5 MHz WOSC - FM 95.9 MHz
Statewide Traffic Information	WTMC - AM 1380 KHz

3.6 PREPARATIONS BEFORE A HURRICANE OR COASTAL STORM

The following precautions should be taken well before a hurricane or severe coastal storm arrives:

- Wedge sliding glass doors with a brace or broom handle to prevent them from being lifted from their tracks or being ripped loose by wind vibrations.
- Unplug all unnecessary appliances. Shut off gas valves.
- Turn refrigerators and freezers to their coldest setting.
- If you are going to evacuate, shut off electricity at its main switch and gas and water at their main valves.
- Package your valuables, such as jewelry, titles, deeds, insurance papers, licenses, stocks, bonds, inventory, etc., for safekeeping in waterproof containers. Take these with you if you are going to evacuate. However, valuables such as jewelry should not be taken to a shelter.
- Outside, turn down canvas awnings or roll them up and secure them with sturdy rope or twine.
- Check door locks to ensure doors will not blow away.
- Check outdoor items that may blow away or be torn loose; secure these items or move items such as potted plants inside.
- Store chemicals, fertilizers, or other toxic materials in a safe section or secure area of the premises.
- Secure propane tanks. They should not be stored near sources of heat (like your water heater or other appliances).
- Fill the gas tank of your car and fill fuel cans for generators.
- Deploy window protections well in advance of the arrival of any winds. For those who have already prepared plywood shutters, partial deployment could begin before there is any official hurricane or coastal storm warning. Closely monitor advisories and warnings to guide your deployment (see Part 4).



- 
- Ensure that you have a sufficient amount of cash in hand to purchase goods and items if needed following the hurricane, as banks and ATM machines may be inaccessible because of a lack of electricity.

3.7 EVACUATION PROCEDURES FOR A HURRICANE OR COASTAL STORM



Your emergency supplies and evacuation kit should already be in place before there is a hurricane watch or warning. In your evacuation plan, you should already have decided if you will stay in your house, go to a shelter, or go elsewhere (e.g., a friend's or relative's house). You should stay in a place that is away from any flood or inundation zones and that is able to withstand strong winds and rain. If you evacuate, you should already have prepared your house and made plans for your pet. Shelter locations are not designated in advance but are determined based on the type and location of hazard event. If you plan to go to a shelter, listen to your local radio or television station for information about the closest open shelter location.

- As a general guideline, you should evacuate if you are located:
 - along low-lying coastal areas;
 - along low-lying areas subject to flooding (for example, near a stream or river);
 - in any Federal Flood Insurance Zone such as a high velocity wave zone (V zone) or flood zone (A zone), even if your house is built for wave action and flooding;
 - along ridge lines exposed to strong winds;
 - in certain wood-frame structures (e.g., single wall without a continuous load path design) or lightly constructed buildings.
 - Go to a shelter only if it is open. Listen to your local radio station or connect to [redcross.org](https://www.redcross.org) for a list of shelters that are open to the public. Local television stations may also provide this information. Shelter locations will be specific to the type of hazard and threat posed by the event.
- 

- Listen to instructions issued by emergency management officials and evacuate with your evacuation kit before danger arrives. If you're evacuating to a designated shelter, follow the directions of personnel who are staffing the shelter. If there are no personnel, the shelter is either not open or you are at a part of the facility that is not being used as a shelter.
- When you get to an evacuation shelter, you will have limited space and there may be a bare floor. You should plan to provide your own bedding and other essentials such as personal hygiene items and medications. Your evacuation kit should contain all of these important items.
- Make the best of the situation and cooperate with the volunteers.
- Local emergency management officials and/or shelter staff will provide notification when it is safe to return home.

3.8 PREPAREDNESS, SAFETY, AND EVACUATION PROCEDURES FOR A FLOOD

Most flash floods are caused by slow-moving thunderstorms, thunderstorms that move repeatedly over the same area, or heavy rains from tropical storms and hurricanes. Each year, more deaths occur due to flooding than from any other thunderstorm-related hazard. The main reason is people underestimate the force and power of water. Many of the deaths occur in automobiles as they are swept downstream. Whether you are driving or walking, if you come to a flooded road, “turn around, don't drown.” You will not know the depth of the water nor will you know the condition of the road under the water.^{3.1}

If you are in a flood warning area or if flooding occurs, get to higher ground immediately. Get out of areas subject to flooding and avoid areas already flooded. Never attempt to cross swiftly flowing water or waters of unknown depth by foot or in an automobile. Do not attempt to cross flowing streams, even a small one, on foot. Road beds may be washed out under flood waters. Never drive through flooded roadways and do not attempt to cross water-covered bridges, dips, or low water crossings. Be especially cautious at night when it is harder to recognize flood dangers.^{3.1}





The general rule if you are evacuating from a flood is to stay away from flood waters and head to higher ground. Stay away from moving water. Even 6 inches of water can make you fall or cause your car to stall. Two feet of moving water can move your car. If there is a flash flood and you are caught in your house, go to the second floor or the roof, if necessary.

3.9 PREPAREDNESS AND SAFETY PROCEDURES FOR A TORNADO



Tornadoes can occur at any time of day, any day of the year. Have a plan of action ready before severe weather threatens, as you will need to respond quickly when a warning is issued or a tornado is spotted. Keep in mind that even though the weather may be calm at the time a Tornado Watch or Warning is issued for your area, conditions can rapidly deteriorate and become life threatening. Occasionally tornadoes develop so rapidly that advance warning is not possible. Remain alert for signs of an approaching tornado such as a dark, often greenish sky, large hail, or a loud roar similar to a freight train.^{3.2}

The safest place to be is an underground shelter, basement, or safe room. If no underground shelter or safe room is available, a small, windowless interior room or hallway on the lowest level of a sturdy building is the safest alternative. Mobile homes are not safe during tornadoes. Abandon mobile homes and go to the nearest sturdy building or shelter immediately.

If you are caught outdoors, seek shelter in a basement, shelter, or sturdy building. If you cannot quickly walk to a shelter, immediately get into a vehicle, buckle your seat belt, and try to drive to the closest sturdy shelter. If flying debris occurs while you are driving, pull over and park. Stay in your vehicle with the seat belt on. Put your head down below the windows, covering with your hands and a blanket if possible. If you can safely get noticeably lower than the level of the roadway, exit your car and lie in that area, covering your head with your hands.^{3.2}

3.10 EMERGENCY INFORMATION AND CONTACTS



For general emergency information, contact your local emergency management agency or the Delaware Citizen Corps, a Prepare Delaware

initiative (delawarecitizencorps.org). Citizen Corps partners with many volunteer and state organizations to promote volunteerism and assist in training and educating the citizens of Delaware on various emergency preparedness topics. The Prepare Delaware website (preparedede.org) provides additional emergency information and resources.

The best time to contact them is when there is no emergency; use them as a resource when you are planning and preparing your evacuation plan. Do not wait until an emergency when these agencies are responding to hundreds or even thousands of calls. Nevertheless, call them if you absolutely need help. However, by planning and preparing ahead, you can help yourself and the agencies.

Please see Appendix A for a list of emergency contact information and Appendix B for shelter information.





Part 4

Protecting Your Property

Protecting your property and protecting your family go hand in hand, since your house may be able to provide shelter from most weather conditions and perhaps even severe conditions. It's never too early to prepare, and you can take several basic steps right now to protect your family and your home from disaster. By strengthening your house, you can reduce the risk of damage to your home and possibly reduce insurance premiums.

The amount of protection your house can provide from a natural hazard is limited by a number of factors that you should very carefully consider:

The Severity of the Hazard Event

Protecting your home against a northeaster or a tropical storm is much easier than against a major event such as a Category 2 hurricane. For stronger storms, eliminating all damage is very difficult, so the main goal is to significantly lessen the amount of damage that could occur. Each and every small improvement you invest in your home can make a difference. The more small improvements you make to your home, the less likely there will be severe damage during minor events.

Your Location

Buildings in proximity to water are much more likely to flood, even during minor storm events. These flooding events can threaten you and your family, and evacuation should be considered even during minor events. In addition, if your home is close to an open beach, a large bay, or a large marshland area, the force of the wind can be much greater than if the house were surrounded in all directions by buildings, other homes, and/or trees.

How and When Your House Was Built

Building codes adopted by some counties and communities require new houses to have connectors that create a continuous load path from the roof to the wall to the foundation. Sussex County has adopted the 2003 International Building Code (IBC), which requires construction in areas where wind speeds can exceed 100 mph (which is most of the county) to

be designed for high winds in accordance with any one of several technical reference documents, all of which usually require help from an engineering professional. Because of this requirement, many newer homes in coastal areas are generally much stronger than those built before this requirement was in effect. It is important to note, however, that building codes provide minimum requirements, not best practices. There have been several revisions to the county building code since 2003. Most of the buildings in the county are older than 10 years and thus built without the benefit of the 2003 IBC requirements.

How Your House is Maintained

Maintenance of your house is important. Painting the exterior every five years protects the wood and prevents rot, which can weaken the structure. Termites can also weaken a wood-framed house. If the wood in the house is rotten or has severe termite damage, it will be more difficult and more costly, or even impossible, to strengthen the home. In the coastal areas of Delaware, there are many places where houses are on crawl spaces and where standing water or high water tables are prevalent. It is important to keep moisture from intruding into the wood of the home and causing decay. Proper maintenance will extend the life of a house in more ways than one.

How You Strengthen Your House

Even if your house was not built with hurricane clips or does not follow continuous load path concepts, there are many small steps and some major ones that can be taken to retrofit or address how to strengthen your existing home.

The remainder of Part 4 concentrates on many of the options to consider when strengthening your home, whether you're designing a new home or planning a retrofit of an existing home, including:

- roof-to-wall connections (e.g., hurricane clips), improving the connection of the roof-sheathing to roof-framing members (rafters or trusses), and reinforcing gable ends with bracing;
- wall-to-foundation connections;
- stronger connectors than those required in the current building code;





- flood retrofit measures (strengthening existing foundations and piers for flood forces, elevating mechanical equipment, and elevating structures);
- protection for windows, doors, and garage doors; and
- alternate sources of back-up electricity.

You may be able to perform the work for many of these measures. However, if the work is beyond your capabilities, consider hiring a licensed structural engineer and/or architect to plan the strengthening and retrofitting program for your home and a licensed contractor to do the installation or construction. Even if you do this work yourself, it is best to contact one or more of these professionals first to obtain guidance and details specific to your house.

The complete topic of retrofitting existing homes has been tackled by numerous non-profit organizations and governmental agencies and the result of their hard work fills many reports and several excellent videos. The following sources can give you more information:

- The Insurance Institute for Business and Home Safety (IBHS) website (disastersafety.org) includes numerous articles, reports, and videos that are extremely informative and explain preventative measures that reduce losses from all natural hazards, including hurricanes.^{4.1} IBHS has a retrofit guide that is used in their FORTIFIED for Existing Homes Program.
- The Mitigation Directorate of FEMA is continuously researching hurricane-resistant designs and building methods for the construction of residences and the performance of residences that have been subjected to hurricanes. All of the government publications are available for free and most can be downloaded from the FEMA website (fema.gov) and the agency's *Safer, Stronger, Protected Homes and Communities* page (fema.gov/safer-stronger-protected-homes-communities).^{4.2} FEMA released a publication on retrofitting existing homes called *Wind Retrofit Guide for Residential Buildings* (FEMA P-804), which is available at fema.gov/library.

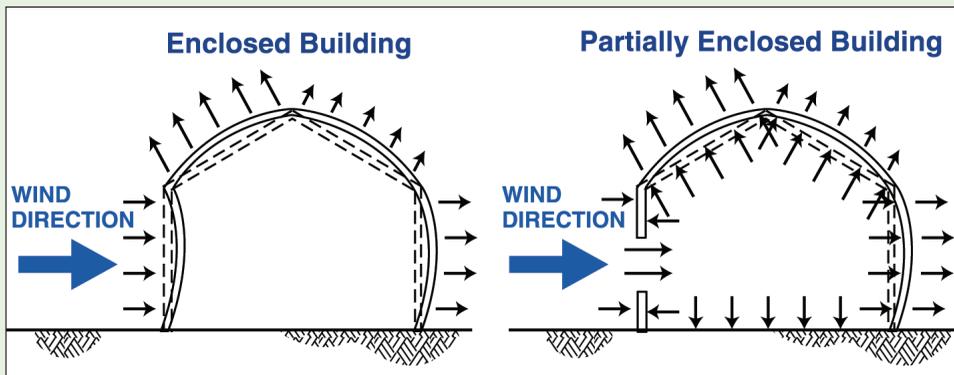


Figure 4-1. The diagram on the left shows a structure with the wind- and rain-resistant envelope intact. Pressure on the walls and roof comes from the outside only. In the diagram on the right, the structure's wind- and rain-resistant envelope has been breached due to a broken window. Now, pressure on the walls and roof comes from the outside and inside. The total amount of pressure on the roof and leeward wall increases significantly and can lead to the roof flying off and complete structural failure. Source: FEMA's *Residential Coastal Construction Manual* (2011)^{4.3}

4.1 CREATING THE WIND- AND RAIN-RESISTANT ENVELOPE

It is very important to protect the envelope of your house from wind and rain. The wind from a coastal storm, especially a hurricane, attacks any weaknesses in the roof. Once a weakness is exposed, adjacent areas can be more easily damaged and peeled away. Windows can serve to protect that envelope, unless they shatter, which is almost certain to happen if they are unprotected. Taping your windows will not protect that envelope. A broken window during a hurricane can be devastating in several ways: Besides the incoming hurricane-force wind and torrential rain in your living room, there is shattered glass and debris from outside flying in. It can make walking in your own house hazardous. Even more importantly, there is the problem with internal pressurization of your house (see Figure 4-1).

A door or window breach can potentially double the uplift forces on your roof and can significantly increase the chances that your roof will lift off.^{4.4} Several FEMA hurricane mitigation assessment reports indicate that breaching of the building envelope and subsequent internal pressurization leads to progressive structural failure for many houses.



4.1.1 KEEP YOUR ROOF ON

The wind from a hurricane attacks any weakness in the roof. Once a weakness is exposed, adjacent areas can be more easily damaged and peeled away. Thus, strengthening the roof is important and it should be considered for new construction and when a roof is replaced after its expected life.

Roof Framing/Truss Bracing

There are three ways generally that roofs and roof systems fail in high winds:

- Roof sheathing can be pulled off the roof framing by high-suction wind pressure.
- Roof framing can fail at the roof-to-wall connection.
- Gable end walls can collapse into the attic space or be pulled out from the exterior wall.

Failure of the roof sheathing can be prevented by ensuring the sheathing is adequately attached to the roof rafters or trusses. This can be done from the outside of the roof at the time the roof covering is replaced. Add nails (8d ring-shank nails are recommended) at a minimum spacing of 6 inches on center around the edge of the roof sheathing before re-applying the roof covering. The sheathing may also be secured to the framing from inside the attic by using closed-cell expansive foam to form a bond between the edge of the roof rafter or truss chords and the underside of the roof sheathing.

Roof-to-wall connections can be accomplished on existing homes in several ways:

- Roof sheathing can be removed while replacing the roof covering, and a connector can be attached from the exterior wall to each rafter or truss. The roof sheathing is then re-installed, and the roof covering is replaced.
- The soffit on the outside overhang can be removed, a new 2"x4" board installed on the exterior siding parallel to the roof, a new connector attached to the rafter or truss, and then installed on the new board and the soffit re-installed.
- A section of drywall or interior wall and roof covering can be removed on the inside of the home, new connectors installed on the inside between the rafters or trusses, and then crown molding or other architectural treatment installed to cover the new connectors.

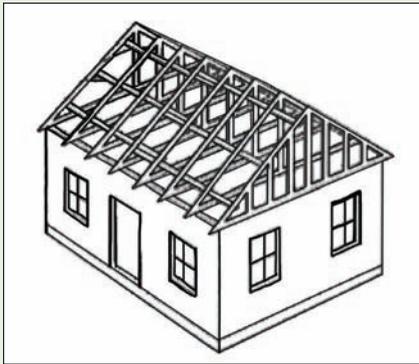


Figure 4-2. Trusses are built with a peak at the ridgeline of the house. The trusses at the end of the house form an A-shaped pattern know as a gable end. During a hurricane, the gable end is subject to great forces from the wind and could tip over, collapsing the other trusses in a domino fashion. Source: FEMA's *Against the Wind* brochure 247



Figure 4-3. In this application of lateral bracing, the 2"x4"s are 18 inches from the ridge and connect to horizontal members that attach the opposing trusses. Not all roofs will have the horizontal members. The 2"x4"s are connected with two #14 3-inch screws (A) and overlap over two trusses (A and B). The end is connected to the gable end with an angle or L bracket (C). Image courtesy of Dennis Hwang

It is possible to significantly strengthen your roof by providing lateral and diagonal bracing to the rafter or trusses. This is particularly important for houses with gable-end roofs. This bracing can be done simply with 2"x4" boards purchased at a hardware store. Figure 4-2 is from the FEMA brochure *Against the Wind* (FEMA 247), which can be downloaded at fema.gov/library.

For lateral bracing, 2"x4" boards are attached to the trusses that run the length of the roof (Figure 4-3). The 2"x4" boards overlap over two trusses. Braces should be 18 inches from the ridge, in the center and at the base, about 8 to 10 feet apart. You or a professional can do this work, although this can be difficult with long pieces of lumber in small attics. This bracing should have been installed when the trusses were installed in newer homes.

Another important type of bracing for your gable end involves making diagonal braces (Figure 4-4). Diagonal braces provide additional support against collapse of the gable end caused by high winds pushing (or pulling) on the gable end. Gable ends are more susceptible to high-wind damage because they are usually installed between the exterior wall of the house and the roof rafter or truss. There is a joint in the wood framing at that point, making the connection of the gable ends a weak link in the load path.





Hip-style roofs do not need as much bracing, as they are aerodynamically superior and they have the bracing built into the design of the structure. While gable end roofs have a flat end that is A-shaped, hip-style roofs have all four sides of the roof sloping towards the center of the roof.

As a side note, there are small things you can do to strengthen the roof even if it is relatively new. For example, if you climb in your attic and see nails that are supposed to attach the plywood sheathing to the truss have missed the truss, then you have found what could be a structural weakness. The joint can be strengthened with a wood epoxy or spray polyurethane foam (Figure 4-5).

FEMA provides guidance on these subjects in its *Homebuilders Guide to Coastal Construction* (FEMA 499) and *Wind Retrofit Guide for Residential Buildings* (FEMA P-804). An additional source of information regarding roofs and how to reduce risks from high winds can be found at the IBHS website, disastersafety.org.^{4,5} The site includes information on re-nailing roof decks, maintaining steep-sloped roofs, guidance for re-roofing, and choosing a roofing material.

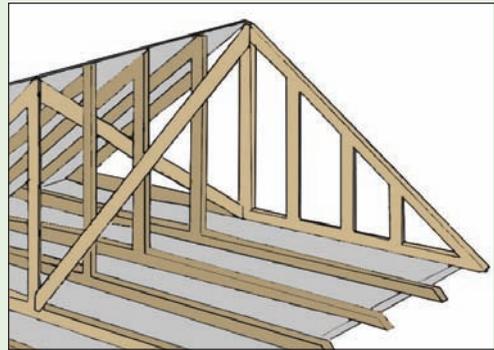


Figure 4-4. Diagonal braces form an X pattern from the top center of the gable end to the bottom center of the fourth truss and from the bottom center of the gable end to the top center of the fourth truss. The same screws as for lateral bracing are used. Source: FEMA's *Against the Wind* brochure 247



Figure 4-5. Spray polyurethane foam is used to add strength between the rafters and the plywood sheathing. This method can be used to strengthen existing roofs and may negate the need to replace older roofs. It can also be used where fasteners are missing or at the corners of hip style roofs or the ends of gable end roofs, which are especially susceptible to wind forces. See FEMA publication numbers P-499 and P-804. Image courtesy of FEMA

Continuous Load Path Connections

The continuous load path connection is analogous to a chain: Both are only as strong as their weakest link. Historically, the weakest link has often been the roof-to-wall connection. Thus, the hurricane clip was created. The concept of continuous load path connection is illustrated in Figure 4-6. This connection ties your roof to your home's foundation and helps to keep the roof from blowing off during a severe wind event.

Naturally, all houses have some connection from the roof to the foundation; otherwise, they would fall apart. However, in some coastal areas, much stronger connections are now required in the form of straps, anchors, and hurricane clips to protect against extreme

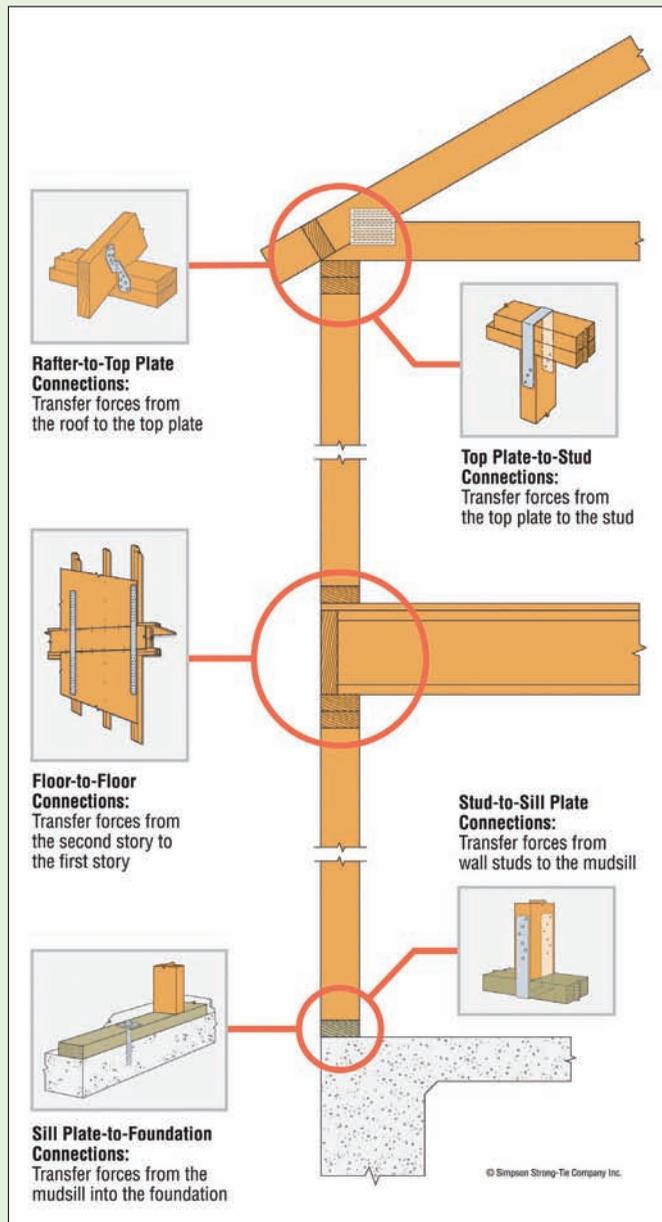


Figure 4-6. Continuous load path connection ties should be used at various locations along the load path. Image © 2012 Simpson Strong-Tie Company Inc.

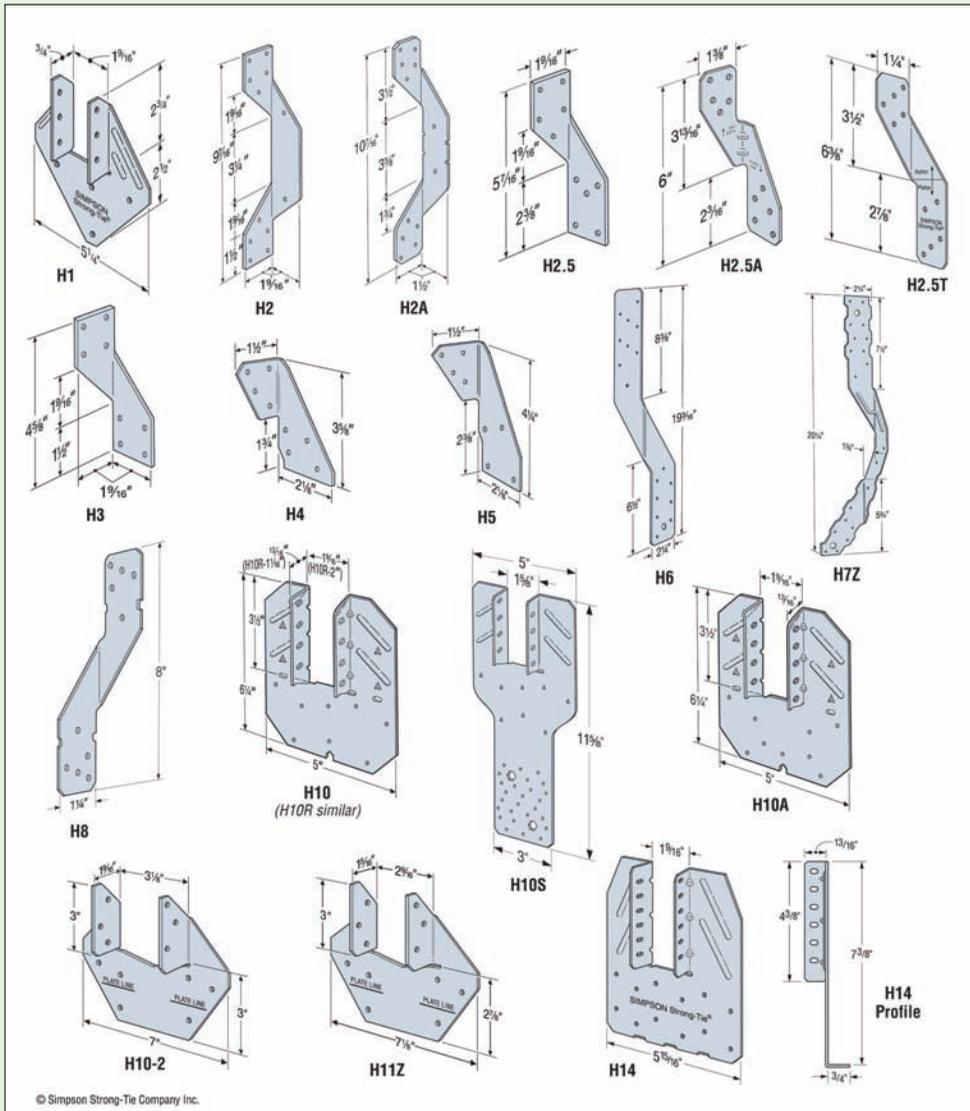


Figure 4-7. There are many different types of hurricane clips. Your licensed architect, structural engineer, or contractor can tell you what is suitable for your house for the amount of protection you want. Image © 2012 Simpson Strong-Tie Company Inc.

winds from coastal storms, as depicted in Figures 4-7 and 4-8. A properly selected hurricane clip is required for each rafter. In addition, the rafters at gable end eaves should be strapped down. Exterior beams supported by corner columns also require strap down. For houses with post and beam



Figure 4-8. This is the popular H2.5A hurricane clip installed during new construction of houses. Five screws are driven into the lower beam (or top plate) and five more are used for the roof (truss-rafter) connection. A hurricane clip is required for each truss-rafter. Upon completion of this structure, the hurricane clip will be hidden from view. This particular clip costs 30 cents. For less than a dollar in material cost, stronger ones can be installed for both new and retrofit applications. Image © 2012 Simpson Strong-Tie Company Inc.



Figure 4-9. This is an example of retrofitting an existing house originally built without hurricane clips. The popular H3 clip is used here; four nails attach the clip to the roof (truss-rafter) and four more nails attach to the wall or top plate below. For a retrofit, the clips are exposed on the outside of the house; therefore, both the clip and fasteners should be corrosion-resistant and painted to blend with the exterior of the house. With the correct clip and nails, you could perform the work or, if you prefer, hire a licensed contractor. Image courtesy of Dennis Hwang

roof construction, fasteners should be installed for roof rafter to roof beams, top of post to horizontal ridge beam, and post to beam connections located at the exterior wall (see Figure 4-9).

You should seek a licensed structural engineer or architect to select the proper connectors and nails for your house. You can then do either all or part of this work yourself or hire a licensed contractor.





Building Beyond Code Requirements

Building beyond code requirements can minimize damage and result in a home that is more wind and flood resistant. For many homeowners, even minor damage of 15 percent or less can be an extreme hardship. After Hurricane Ike (2008) in Texas, FEMA conducted an assessment of both wind and flood building performance and determined the following:

As is frequently observed during Mitigation Assessment Team (MAT) investigations, damages to buildings and other structures are routinely produced by less than design wind speeds due to the following: lack of understanding of basic wind-resistant design and construction practices; insufficient codes and standards at the time of construction; insufficient or lack of design guides and/or test methods at the time of construction; and improper or non-compliant building modifications or lack of maintenance by the property owners.

Overall, the damages observed by the MAT were consistent with typical wave damage patterns, where damage to properly designed and constructed elevated homes is generally minor until such time as the waves reach above the elevated floor system, at which point the damage increases dramatically with increasing water level and wave height. Performance of residential building foundations with regard to coastal and near-coastal hazards depended primarily on the residence having adequate elevation, proper construction, and proper foundation selection. If any of these criteria were not satisfied, performance suffered.^{4,6}

In Sussex County's designated coastal wind zone, recently built houses are required to have the complete load path connection. For older houses, it is possible to retrofit to add components of the connection (see Figures 4-6 and 4-7). Each house is different but, in general, it will be easier and less expensive to put in hurricane clips than to do the foundation connection. Check with a licensed architect, structural engineer, or contractor to determine what is feasible for your house.

Strengthening the foundation to resist uplift will generally require the removal of interior finishes. The installation of uplift connections should be planned by a licensed structural engineer and only after they have inspected the home to understand materials and methods used to construct the home and have calculated the wind uplift requirements.

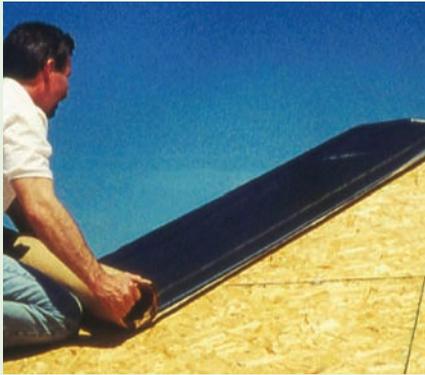


Figure 4-10. Synthetic underlayments are typically made from polypropylene, polyester, or fiberglass fabric, which weighs less than felt building paper, can be manufactured with anti-slip surfaces, and can withstand exposure to the elements for six months. Image courtesy of Carlisle Coatings & Waterproofing

It is preferable to do both the roof-to-wall connection and the wall-to-foundation connection. However, if the wall-to-foundation connection is too difficult or expensive because of the way your house was built, installing only the roof-to-wall connection is better than doing nothing. Remember, the weakest link for many homes is the roof-to-wall connection, and thus the hurricane clip will make that weakest link significantly stronger and improve the performance of the home during weaker wind events. Should Delaware experience a design wind event of nearly 120 mph however, houses without a strong floor-to-foundation connection are still expected to fail.

Synthetic Roof Underlayment

Until the 21st century, most residential sloped roofs received a layer of asphalt-saturated felt building paper underneath the roofing material. Mimicking the attributes of house wraps, synthetic roof underlayments (Figure 4-10) are now available that serve the same function as a secondary weather barrier with better resistance to tearing, moisture, and ultraviolet rays than traditional roofing felt.

Recent natural disasters and subsequent rebuilding efforts have highlighted the versatility of synthetics as roof underlayments by providing a real-life test environment. After several hurricanes ravaged southern coastal areas of the United States, many people were forced out of their damaged homes. At the same time, large numbers of homes required quick roof repair and “drying in” to minimize further damage due to water intrusion. With limited resources, contractors triaged homes, repairing the critical components and installing synthetic underlayments as temporary roofing. The underlayments performed better than FEMA’s blue tarps and did not require removal and discarding when the new shingles were installed.^{4,7}





4.1.2 KEEP WATER OUT

Flood Prevention

Protecting your property from flooding can involve a variety of actions, from elevation to inspecting and maintaining the building to installing protective devices. Most of these actions, especially those that affect the structure of your building or their utility systems, should be carried out by qualified maintenance staff or professional contractors licensed to work in your state, county, or city. The most important information to know about your home when considering flood prevention techniques is the relationship between the base flood elevation (BFE) shown on the Flood Insurance Rate Map (FIRM) for your community and the elevation of your lowest floor (the one that would get wet if flooded).

FEMA's National Flood Insurance Program (NFIP) website (floodsmart.gov) provides detailed information on flooding and flood risks, including a flood risk profile tool that will rate the flood risk for a specific address: floodsmart.gov/floodsmart/pages/flooding_flood_risks/defining_flood_risks.jsp.

The best way to reduce damage from floods for residential structures in a flood-prone area is elevation. An excellent source of information about floods and protecting your property from flooding is found on FEMA's *Ready-Prepare, Plan, Stay Informed* website (ready.gov/floodawareness). Additional information is available in FEMA's *Coastal Construction Manual* (FEMA P-55), *Protecting Your Property from Flooding* (fema.gov/plan/prevent/howto/index.shtm#4), *Home Builder's Guide to Coastal Construction* (FEMA P-499), and *Homeowner's Guide to Retrofitting* (FEMA P-312).



Wet Floodproofing

For those homes not located in a special flood hazard area and if local regulations allow, you could consider the option of wet floodproofing your home. Wet floodproofing means modifying the uninhabited portions of the house, such as a crawlspace, so that floodwaters can get in but won't cause significant damage. It may be a practical solution for parts of the house that are not living space. Remember that wet floodproofing does nothing to alleviate the threat from fast-moving floodwaters, which are often a major cause of damage.

Wet floodproofing encompasses a variety of measures.^{4,8}

- Use Flood-resistant Materials—Materials have differing abilities to resist flood damage. Flood resistance classifications have been developed for flooring, wall and ceiling materials, and the adhesives used to install them. These classifications are published by FEMA and are listed in *FEMA Technical Bulletin 2: Flood Damage-Resistant Materials Requirements* (fema.gov/library). Examples that can be very attractive and flood resistant include clay tile, stone, or brick with waterproof mortar; solid vinyl flooring with chemical-set adhesives; stained concrete; terrazzo; decay-resistant or pressure-treated woods; and rigid, closed-cell foam insulation.
- Create Flushable, Drainable Walls—In wet floodproofing, floodwater should be able to flow into and drain out of walls and other cavities to prevent damage from water pressure and keep the wall cavity from trapping contaminants. After flooding, there should be a way to drain, clean and dry these spaces easily to remove silt and contaminants and prevent the growth of harmful fungi and bacteria. Consider removable wide baseboards or wainscoting.
- Elevate Appliances and Utilities—Items to elevate include your outside air conditioner compressor, inside furnace or air-conditioning unit, washer and dryer (choose front-loaders if on platform), water heater, freezer, and electrical outlets and switches. Also substitute cooktop and wall ovens for freestanding range or drop in units. An appliance can be elevated by placing it on a sturdy, flood-resistant platform or a strong shelf, which is securely attached to a structural support that can withstand flooding. If wood is used, it should be solid, pressure-treated lumber.
- Install Barriers around Appliances—Build a mini flood wall around appliances where shallow-depth flooding occurs often or set the washer and dryer on sturdy plastic sheeting or bags that can be raised during a flood threat.
- Add a Storage Building above Flood Levels—Relocate some appliances to a new building built high enough to be safe from flood damage. Keep enough space available in it to store valuable furnishings during a flood threat. Construction of the building may be subject to regulation.





Keep these points in mind when you wet floodproof:^{4,9}

- Activities that involve work on the electrical system, gas, or air-conditioning compressor usually require the services of a licensed contractor. Check with your local permit official to find out about requirements in your area.
- Raising the electrical system above flood levels will protect it from water damage, but it won't make it safe to have service turned on while water is in the building.
- Even when a home is allowed to flood, sewage backflow prevention is important to prevent the serious health hazards and more expensive cleanup procedures associated with that type of contamination. A backflow valve should be installed.
- Since wet floodproofing does not keep the structure dry, cleanup still is very important. Even if you successfully stop sewage backup through your plumbing, there is a good chance water coming in from outside has some chemical and biological contaminants. Disinfection, cleansing, and thorough drying are essential to remove contamination and to prevent growth of hazardous molds and decay.
- Wet floodproofing activities will not reduce your flood premiums, so the motivation for this activity should center on reducing the damage caused by flooding. During a flood event, you may still be required to evacuate by local emergency management officials.

Dry Floodproofing

When elevation is not an option, another way to protect a structure and its contents from flood damage is to seal the building so that flood waters cannot enter. Dry floodproofing is primarily for slab on grade buildings with concrete or solid masonry walls. It cannot be used to put residential structures in compliance with the National Flood Insurance Program. It may have application in sturdy, structurally sound buildings in areas of shallow, low-velocity flooding. Check with your state floodplain coordinator and local NFIP regulator for applicability. In addition, this flood protection method is not for buildings located in coastal high hazard areas like V zones or coastal A zones (as designated on FEMA Flood Insurance Rate Maps). These special flood hazard areas are not only subject to inundation by the

1-percent-annual-chance flood event, but are also subject to additional hazards due to storm-induced velocity wave action.

You should consult a design professional before undertaking a dry floodproofing project. Dry floodproofing is not effective when water velocities are high, when waves are present, or for rapidly rising water. Dry floodproofing is appropriate primarily for slab-on-grade buildings with concrete or solid masonry walls. Concrete and masonry are easier to seal, more resistant to flood damage, and stronger than other conventional construction materials.^{4,8}

Dry floodproofing encompasses a variety of measures:^{4,8}

- applying a waterproof coating or membrane to the exterior walls of the building;
- installing watertight shields over doors, windows, and other openings;
- anchoring the building as necessary so that it can resist flotation;
- installing backflow valves in sanitary and storm sewer lines;
- raising HVAC and electrical system components above the flood level;
- anchoring fuel tanks and other storage tanks to prevent flotation;
- installing a sump pump and foundation drain system;
- strengthening walls so that they can withstand the pressures of flood waters and the impacts of flood-borne debris;
- building with materials that are flood-resistant, i.e. can withstand flood waters for at least 72 hours (examples: concrete, ceramic tile, pressure-treated lumber, steel, metal, brick, epoxy paint, foam, and closed-cell insulation); and
- ensuring wells are properly constructed to avoid contamination from floodwaters.

Keep these points in mind when you dry floodproof:^{4,8}

- There are several disadvantages to dry floodproofing. Flood insurance premiums are not reduced for dry floodproofed residential structures. Ongoing maintenance is required, adequate warning time is required to close any openings, and the home must not be occupied during a flood.





- The height of your dry floodproofing should not exceed 3 feet. The pressures exerted by deeper water can cause walls to buckle or collapse. Before you use dry floodproofing to protect against greater flood depths, have a structural engineer evaluate the strength of your walls.
- If your dry floodproofing measures require human intervention before flood waters arrive, such as placing shields over doors and windows, you should have an operations and maintenance plan that describes all the actions that must be taken and lists the people who are responsible. It should also include a schedule of periodic maintenance that states how often the dry floodproofing measures will be inspected and who will perform the inspections.
- The cost of individual dry floodproofing measures will vary with the size, condition, and use of your building; the dry floodproofing height; and the extent to which you use contractors and engineers.
- In many cases flooding on a property can be caused by poor drainage. If this is the case, it may be of great benefit to address the drainage issue with the professional advice of a licensed civil engineer.

4.1.3 WINDOW AND DOOR COVERINGS

Protection of your home’s envelope from breaches during a windstorm is critically important, particularly to its vulnerable windows and doors.

If your home is located in a high-wind zone, it is important that window coverings not only withstand hurricane-force winds, but also withstand windborne-debris impacts. The usual standard for impact resistance is known as the “Large Missile Impact Test.” Essentially, it determines whether a given covering can withstand the impact of a 9-pound 2"x4" board fired at 30+ mph.

Coverings should be tested and approved to meet industry standards for hurricane impact and should carry a label indicating such approval. Check with the manufacturer. Use only licensed contractors and reputable dealers selling products tested by reputable testing vendors.

The International Hurricane Protection Association (a trade association group comprising manufacturers, contractors, and other industry professionals) has several tips regarding selection of products, selection of

installing contractors, and other useful information on its website (inthpa.com).^{4,10} For further information regarding opening protection, visit the IBHS website (ibhs.org), in particular the Fortified for Existing Homes Program.

Several types of window and door opening protection systems are generically described below. Within each category, numerous reputable manufacturers provide different products, each with individual features, benefits, and costs. The prices shown are estimates for installed costs and represent local and nationwide averages as of May 2010. Pricing will vary between providers and change over time. You should consult with a competent contractor specializing in supplying and installing these systems.

Roll-down Shutters

Roll-down shutters represent the window covering type that is easiest to deploy and offers the best overall protection features (Figure 4-11). These are permanently attached to the building. The shutter consists of a movable “curtain” of slats that is held in place by vertical tracks. When not deployed, the shutter stores in a hood that is housed above the window or door being protected. Most of the components of roll-down shutters are made from extruded aluminum.

Because the roll-down shutter makes solid contact with the window sill, patio deck, or other structure at the bottom of the shutter and its farthest extent of travel, this shutter type demonstrates the highest level of protection against wind-driven rain in addition to wind and debris. Roll-down shutters can be deployed using a variety of operators—both manual and electric motor types. These



Figure 4-11. Coastal home protected with roll-down shutters on all windows and doors. The shutter is held in place by vertical guide tracks and can be deployed manually or with an integrated electric motor. Image courtesy of QMI, Inc.



can be installed directly over windows and doors, or in some cases, at a balcony's edge to form an enclosure.

Since roll-down shutters are easily deployed, they often are used on a regular (non-storm) basis for light control, insulation against heat and noise, or privacy and security. The variety of features and methods of operation leads to a wide range of costs for this shutter type. These shutters can be made for custom sizes and uses.

Accordion Shutters

One of the most commonly used shutter types in hurricane-prone regions is the accordion shutter (Figure 4-12). This is a permanently installed system with interconnected "blades" that operate between horizontal tracks. When not in use, the blades fold and are stored on either side of the door or window being protected. Accordion shutters are manually deployed and can be deployed from the inside of the home, if the opening is a single- or double-hung window or an in-swinging window or door. Installed prices range approximately \$16 to \$30 per square foot.



Figure 4-12. Accordion shutter (shown in the open position) installed over a large window of a coastal home. Shutter has been installed to allow deployment from inside the home. Image courtesy of Roll-a-way

Decorative/Protective Shutters

For homeowners who wish to add a decorative flair to the home's exterior while protecting windows against storm forces, Bahama (or Bermuda) shutters are available (Figure 4-13). These are most commonly made using extruded aluminum frames and louvers, although some composite materials have also been used in these types of shutters. Typically, these are finished using a durable exterior grade powder coating or automotive-grade polyurethane paint system.



Figure 4-13. Bahama shutters made from durable extruded aluminum components add “islands” flair to a home and provide effective opening protection. Image courtesy of Roll-a-way



Figure 4-14. These 0.050 gauge aluminum storm panels offer cost effective storm protection. In this example, panels slip into a track above the window and secure onto a bottom track using wingnuts. Image courtesy of Roll-a-way

While these shutter types imitate the design of traditional wood shutters, it should be noted that no wood shutter of either type has been tested and approved as opening protection since wood will not pass the “Large Missile Test.”

Storm Panels

Removable storm panel systems (Figure 4-14) are one of the most widely used and cost-effective systems available for opening protection. These consist of a series of panels, made from steel, aluminum, or impact-resistant polycarbonate.

When not in use, panels are stackable for convenient storage. A wide variety of track options are possible. While these systems are relatively inexpensive (approximately \$7 to \$15 per square foot, depending on panel type and track options), they require much more effort for the homeowner to deploy than the other types mentioned above.





Figure 4-15. In-place stainless steel impact screen protects several windows of a coastal residence. This system requires no deployment and provides shade. Image courtesy of Roll-a-way



Figure 4-16. Flat impact polycarbonate panels are installed directly over windows of a coastal home. This window covering provides excellent storm protection with minimal aesthetic impact. Image courtesy of Roll-a-way

In-Place Systems

Requiring no advance deployment, impact-resistant systems that are permanently installed on a structure can be an attractive option for opening protection. Two types currently on the market are impact-resistant stainless steel screen units and installed flat impact polycarbonate. Both have little, if any, negative aesthetic impact on the home.

Impact-resistant stainless steel screen systems (Figure 4-15) consist of a heavy gauge stainless steel screen mesh that is secured in an extruded aluminum frame. The unit is installed over the window to be protected. These are available as operable units, which facilitates cleaning and emergency escape. Screen units also provide excellent solar shading characteristics. These systems cost approximately \$25 to \$50 per square foot.

Flat impact polycarbonate units (Figure 4-16) are

available to protect most single and double window sizes and types found in residential homes. They are made from UV-stable optical quality grades of polycarbonate and provide excellent protection against all storm forces. Because these systems are not operable from the inside of the home, emergency escape from the home must be considered before installing this

system. Typical systems cost approximately \$25 to \$35 per square foot.

Fabric Windscreen

Impact-resistant fabric panels (Figure 4-17) made from high tensile strength geosynthetic fibers such as polyethylene or reinforced PVC have become increasingly popular for use as window and door protection. These systems are attached on opposite sides of the window or door, usually to permanently installed panel mates or tracks with mounting studs. The panels include integrated grommets, which facilitate the deployment of the windscreens. These systems are relatively inexpensive, costing approximately \$7 to \$12 per square foot.

The polyethylene fabric types, which are basket weave systems, allow some light and visibility through the deployed screens. Some models incorporate emergency escape zippers.

The PVC types are somewhat translucent, allowing light in the dwelling, but do not allow visibility through the screen.

Geosynthetic screens have also been extensively employed to enclose large, even irregularly shaped openings (Figure 4-18). Such systems range in price from \$20 to \$40 per square foot. Because of the installation requirements



Figure 4-17. Polyethylene basketweave fabric windscreens deployed directly over ground floor windows of a coastal home. Image courtesy of Roll-a-way



Figure 4-18. Polyethylene basketweave fabric windscreens deployed at edge of patio, enclosing the entire area. Image courtesy of Roll-a-way





Figure 4-19. This attractive window can be fitted with energy-efficient glass, impact-resistant glass, or both. The impact-resistant glass consists of a laminate or film sandwiched between two glass panes. The frames are reinforced and the hinges have extra fasteners to withstand high-wind events. Wind-generated debris may crack the glass, but the laminate will hold the windowpane together in the frame and prevent breaching of the wind- and rain-resistant envelope. After the storm, the glass will need to be replaced. Image courtesy of Dennis Hwang

of such systems, site-specific engineering is often required. Consultation with a contractor is recommended.

Impact-resistant Windows and Glazed Doors

In order to withstand both wind pressures and impact from windborne debris, window and door manufacturers have developed products with both sturdier frames and laminated (impact-resistant) glazing (Figure 4-19). Such systems are available in a variety of styles, options, and costs.

While impact-resistant openings offer deployment-free protection, the glass can still be broken (but remains in the frame). Also, while these products are often available to the consumer through home improvement stores, professional installation is highly recommended in order to ensure that proper attachment of the windows to the structure is achieved.

Plywood

Historically, plywood has been the most commonly used option for protecting window openings. This is undoubtedly due to its relatively low cost and ready availability. Plywood coverings offer protection for moderate level storms if properly installed (Figures 4-20 and 4-21).

Plywood can rot or warp if stored in a wet or warm area. Also, plywood is relatively heavy. You will need two people to help prepare and install plywood window coverings. Because of its weight, it would be difficult



Figures 4-20 and 4-21. Not only is it necessary to install plywood opening covers correctly, it is also important to correctly label them and store them away from heat and humidity. Images courtesy of Dennis Hwang

or even dangerous to install plywood if a ladder is needed. Thus, plywood shutters may be appropriate for easily accessible windows on the first floor, or windows that can easily be reached by a terrace or patio on upper floors.

Although you can install plywood shutters yourself to save on cost, you should still seek the advice of a licensed architect or structural engineer before you start. Professionals can guide you on specific details for your windows.

A general recommendation is that you use at least 5/8-inch exterior-grade plywood for shutters. Thinner plywood is not as strong and did not perform as well during destructive Hurricane Andrew in Florida in 1992. While the International Residential Code (and other similar codes) allows some use of plywood as protection under very specific conditions, those allowances are restricted to areas where the design wind speed is 130 mph or less.

For more information on hurricane shutter design using plywood, please refer to apawood.org.

Window Film

An after-market product used to enhance glass breakage prevention is commonly known as security window film. Such products are often touted as “hurricane film” or similar claims that cannot be substantiated by testing. Application of any of these window films to existing windows does NOT constitute adequate opening protection and should not be considered for



Table 4-1. Pros and Cons of Various Types of Window Protection

Type of Protection	Pros	Cons	Approx. Cost for 3'x4' Window Protection
Roll-down Shutters	Easiest to deploy; Good overall protection, especially from wind-driven rain	Most expensive of permanent shutter systems; Motorized versions need manual backup for power outages or an emergency power source	\$360 to \$600
Accordion Shutters	Easily deployed; Simple manual operation; Good overall protection; Modest cost	Possible aesthetic issues	\$300 to \$360
Bahama Shutters	Easily deployed; Good protection; Provides shade	Blocks some light and view	\$360 to \$480
Storm Panels	Strong; Removable; Relatively inexpensive permanent shutter system; Good protection for the costs	Manual deployment required; Requires adequate space for storage when not in use	\$144 to \$168
Stainless Steel Impact Screens	Always in place; Provides shade	Some aesthetic impact; Emergency escape issues must be considered; Less effective for wind-driven rain	\$375 to \$750
Flat Impact Polycarbonate Units	Always in place; Minimal aesthetic impact	Emergency escape issues must be considered; Care must be taken in cleaning	\$375 to \$525
Fabric Windscreen (Direct Mount)	Inexpensive; Easy to handle and store	Manual deployment required; Greater shutter deflection than metal systems	\$105 to \$180
Impact Resistant Windows and Doors	Attractive and energy efficient; Provides security protection and storm resistance; Always in place; Many styles and options	Costs vary widely and can be high; Replaces existing windows or doors; Glass can still break requiring expensive replacement	Wide range in costs: \$360 to \$600 and higher
Plywood	Materials readily available; Easy to install on lower levels; Inexpensive	Not as strong as some other shutter systems; Manual deployment is difficult on upper levels; Must be properly stored; Doesn't provide impact-resistance for winds >130 mph	\$25 to \$35 for materials only

Note: Be certain that purchased products (other than plywood) have been tested and approved to meet industry standards for hurricane impact and that they carry a label indicating such approval.

use as opening protection. For more information, visit the website of the International Window Film Association (iwfa.com).^{4.11}

Table 4-1 lists the advantages and limitations of each type of covering discussed above. For most homes, a combination of different covering types is employed, based on the needs and budget of the homeowner.

Impact-resistant Garage and Entry Doors

One of the most important yet overlooked openings in a home that requires protection are its garage and entry doors. Most major suppliers of both types of doors offer products (with or without glazing options) that meet both wind- and impact-resistance requirements. Often, the replacement of a non-rated door with one of these newer types is cost-effective when compared to the cost of providing a covering for the older door.

As with impact-resistant glazed windows and doors, a qualified professional installer should be used to install an impact-resistant garage or entry door. Doors that swing out are more storm resistant than in-swing doors because the door is closing against the door jamb, which provides resistance to the door being pushed in by high winds.

The garage door is a significant weakness in the building envelope due to its large area and the stress it is subject to from wind pressure (Figure 4-22).



Figure 4-22. Because of their width, double-wide garage doors are more susceptible to wind damage than single doors. The wind can force it out of the roller track, especially if the track is lightweight or some of the anchor bolts are not in place. This occurs because the door fails under excessive wind pressure. You should reinforce your garage door by installing horizontal and/or vertical bracing onto each panel, using wood or light gauge metal girds bolted to the door mullions. You may also need heavier hinges and stronger end and vertical supports for your door.^{4.12} Image courtesy of Florida Hurricane Depot





Figure 4-23. Vertical braces such as these can be deployed during high-wind events to strengthen the garage door. The braces are secured from the header over the garage door to the fasteners installed in the concrete floor. Deployment and breakdown are about 10 minutes each. The windows have been covered with a laminate film. Image courtesy of Dennis Hwang

Garage door options include:

- replacement with a stronger door;
- horizontal bracing;
- vertical bracing; or
- other type of a garage door bracing kit.

For many garage doors, vertical bracing is a popular and reasonably priced option (Figure 4-23).

Double entry doors should have slide bolts at the top header and bottom threshold of the inactive door, a deadbolt with at least 1-inch throw length between each door, and three hinges for each door. This requirement is similar to other guidelines for single entry doors, which call for at least three hinges and a bolt long enough that goes into the 2"x4" framing of the door. Whenever entry doors are fortified, at least two of them must be operable for access and exiting at any time.

4.1.4 TREES

Cutting or trimming trees that overhang your house are additional measures that you can take to protect your property during a hurricane. Although trees provide a buffer to the full strength of the wind, there is a serious danger if there are large trees or limbs that are close enough to fall on the house. Few roofs are strong enough to withstand a falling 20-inch diameter, 40-foot tall pine tree.

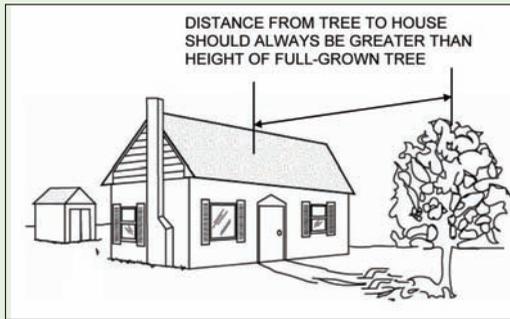


Figure 4-24. FEMA recommends that the distance between a tree and your house should always be greater than the height of the full-grown tree. This is to prevent trees from falling on the roof, either currently or in the future. Image courtesy of FEMA

Tree limbs or branches falling onto your house will cause considerable damage. Figure 4-24 illustrates the distance from the tree to the house to ensure that falling limbs do not affect the roof. If it is not possible to remove a tree, you can at least cut off all branches that hang over the roof of the house. Generally, you should hire a licensed tree trimmer to perform this work.

Trees with shallow roots may also be susceptible to falling over when the soil is saturated. Shallow roots cannot prevent a tree with leaves from falling over when the tree canopy is filled with blowing wind. This is a probable occurrence when the area is affected by severe rainfall along with heavy winds, which is usually the case with northeasters and hurricanes.

4.1.5 SAFE ROOMS

A safe room is designed to withstand winds from the strongest hurricanes (Categories 3 to 5) and strong tornadoes. This option should only be considered if the house is outside of all known flood and storm surge zones and is strengthened to the highest level. Safe rooms should not be built in a flood zone, where there is threat of moving water. During a hurricane or other high-flood event, these areas need to be evacuated no matter how fortified the room is against the wind.

It is much less expensive to build a safe room during original construction of the house. FEMA notes that while construction costs vary nationwide, the cost to build a safe room inside a new house (which can also double as a master closet, bathroom, or utility room) ranges from \$2,500 to \$6,000.

The additional cost can be wrapped into the original home mortgage. This is a good investment that yields a sizable return by adding value to your house as well as protection and peace of mind for your family.





For more information regarding the design and construction of safe rooms in homes, see FEMA's *Taking Shelter from the Storm* (Publication 320) available at fema.gov. Additional information is available at the Federal Alliance for Safe Homes, Inc. website (flash.org) and the safe room website (highwindsaferooms.org).

4.2 ELECTRICAL AND POWER ISSUES



In case of an emergency, the power to your house should be turned off through the main breaker switch, circuit breaker panel, or fuse box. In addition, all homes should be equipped with ground fault circuit interrupters (GFCIs). GFCIs are inexpensive electrical devices that, if installed in household branch circuits, are designed to protect people from severe or fatal electric shocks. GFCIs could prevent over two-thirds of all electrocutions.^{4.13} Because a GFCI detects ground faults, it can also prevent some electrical fires and reduce the severity of others by interrupting the flow of electric current. GFCIs are commonly found in kitchens, bathrooms, laundry rooms, or other places where water and electricity are close together. If you don't have them, consider having them installed by a licensed electrician.^{4.13}

By following key safety precautions when dealing with electricity during and after storms and other disasters, you can help prevent death, injuries, and property damage. Take care when stepping into a flooded area and be aware that submerged outlets or electrical cords may energize the water, posing a potentially lethal trap.^{4.13}

Flooded Areas: Do not use electrical appliances that have been wet. Water can damage the motors in electrical appliances such as furnaces, freezers, refrigerators, washing machines, and dryers.^{4.14}

Wet Electrical Equipment: A qualified service repair dealer should recondition electrical equipment that has been wet. For more information, the National Electrical Manufacturers Association (NEMA) has produced a brochure, *Guidelines for Handling Water Damaged Electrical Equipment*, for use by suppliers, installers, inspectors, and users of electrical products to provide advice on the safe handling of electrical equipment that has been exposed to water. It outlines whether items will require complete replacement or can be reconditioned by a trained professional. Items covered include



electrical distribution equipment, motor circuits, power equipment, transformers, wire, cable and flexible cords, wiring devices, GFCIs and surge protectors, lighting fixtures and ballasts, motors, and electronic products.^{4.13} The NEMA brochure can be downloaded free of charge at nema.org.^{4.14}

Downed Power Lines: These can carry an electric current strong enough to cause serious injury or death (Figure 4-25). The following tips can keep you safe around downed lines.^{4.13}

- If you see a downed power line or wire of any kind, move away from the line and anything touching it. You may not be able to differentiate between a cable, telecommunications, or electric wire, so stay clear of all downed wires of any kind. Avoid contact with objects that could come in contact with downed wires such as metal fences, sheds, vehicles, and tree limbs and branches. The human body is a ready conductor of electricity.
- The proper way to move away from the line is to shuffle away with small steps, keeping your feet together and on the ground at all times. This will minimize the potential for a strong electric shock. Electricity wants to move from a high voltage zone to a low voltage zone—and it could do that through your body.
- If you see someone who is in direct or indirect contact with the downed line, do not touch the person. You could become the next victim. Call 911 instead.
- Do not attempt to use another object such as a broom or stick to move a downed power line or anything in contact with the line. Even nonconductive materials like wood or cloth, if lightly wet, can conduct electricity and then electrocute you.



Figure 4-25. Downed or damaged power lines in a residential area can pose a serious danger to public safety. Image courtesy of U.S. EPA



- 
- Be careful not to put your feet near water where a downed power line is located.
 - If you are in your car and it is in contact with a downed line, stay in your car. Tell others to stay away from your vehicle.
 - If you must leave your car because it's on fire, jump out of the vehicle with both feet together and avoid contact with the car and the ground at the same time. This way you avoid being the path of electricity from the car to the earth. Shuffle away from the car.
 - Do not drive over downed lines.

4.2.1 ALTERNATE POWER SOURCES



Before discussing alternate power sources during an emergency, one general suggestion is to make your house as energy efficient as possible as you replace equipment and appliances in your house after they have outlived their normal life. For example, if your lights, television, or refrigerator need replacing, consider products with the EPA's Energy Star label (Figure 4-26). These products may cost slightly more, but over their lifetime, the energy savings will far outweigh the small initial cost increase.

Energy efficient equipment will be especially useful during an emergency, when you may be on alternative forms of power with limited supply. For example, a regular 100-watt lamp running off an emergency power station (essentially built around a car battery) may run for two hours. That same emergency station can run a fuel-efficient 23-watt compact fluorescent light almost 8 to 9 hours with the same light output. As another example, a refrigerator with the Energy Star label can run on a fuel-efficient generator for 16 hours on one gallon of gas. Since most refrigerators do not need to run continuously, it may be possible to run the efficient refrigerator on one gallon of gas for one or two days.



Figure 4-26. Items with the Environmental Protection Agency's Energy Star Label use much less energy than standard models. Items include washing machines, dishwashers, refrigerators, freezers, air conditioning units, and light bulbs.

4.2.2 GENERATORS

Some households may require uninterrupted power because of the critical needs of some family members. For example, the elderly, disabled, or sick may require a respirator, dialysis machine, or other medical equipment. Some medicine such as insulin, which is stored over a month, may need to be refrigerated. For many families, the most important major power requirement is to run a refrigerator or freezer. If your family cannot get by without the refrigerator or there are other critical power needs for medical or other purposes, then you may want to consider a portable generator.

Take special care with portable electric generators, which can provide a good source of power but can become deadly if improperly installed or operated.^{4,13} Power from generators can backfeed along power lines and electrocute anyone coming in contact with them, including electric utility line workers who are making repairs. A qualified, licensed electrician should install your generator to ensure that it meets local electrical codes.^{4,14}

Other generator-related tips:

- Make sure your generator is properly grounded.
- Keep the generator dry.
- Plug appliances directly into the generator.
- Make sure extension cords used with generators are rated for the load, free of cuts and worn insulation, and have three-pronged plugs.
- Do not overload the generator.
- Use a ground fault circuit interrupter (GFCI) to help prevent electrocutions and electrical shock injuries. Portable GFCIs require no tools to install and are available at prices ranging from \$12 to \$30.



Most importantly, never run a generator indoors or in your garage because of the possibility of carbon monoxide gas accumulation, which cannot be detected by smell. Good ventilation is required. Operate your generator outside and away from open windows. Do not hook up a generator to your house power supply without a licensed electrician.^{4,14}





In general, when running your refrigerator with a generator, keep the refrigerator and freezer at the coldest setting. Refrigerators may only need to run a few hours a day to preserve food. Using a refrigerator thermometer, you should aim to maintain 40°F in the refrigerator compartment and 0°F in the freezer. Open the refrigerator door as little as possible.

This handbook does not recommend any particular generator or brand. However, if you are considering a generator, look first at your power needs and then at cost, reliability, quietness, and fuel efficiency, among other factors. You may want to read consumer reviews of generators and consider some of the following factors:

Power needs. Size the generator so that it runs the equipment you need or want to run in an emergency. It will make a difference if you just run the refrigerator, versus the refrigerator, lights, and other equipment. Some equipment such as a refrigerator may require 500 watts to run but 1,500 watts to start up. Each piece of equipment is different. You can get general guidelines from the manufacturers in the form of charts and tables for equipment power needs. A more accurate estimate, however, is to call your manufacturer or buy an amp meter that measures running and startup wattage or amperage. You can also get good advice on sizing a generator from the dealer where you buy the unit.

Fuel efficiency. During an emergency there will be limited fuel supplies. The amount of power you need and the fuel efficiency of the generator will determine if you need one or two gallons per day instead of five or six.

Quietness. Generators are usually noisy, but some are quieter than others. If you need to run a generator, your family and neighbors will appreciate a quiet generator.

4.2.3 POWER STATIONS

Power stations are found in many hardware stores and may have a radio, flash light, air compressor, battery jump starter, AC outlet, and/or DC outlet built around a modified car battery. These units can come in handy during a power outage, since they can form part of your stock of emergency supplies and also provide limited emergency power. If your cordless phone does not work because the base of the unit has no power, a power station

could supply electricity so that calls could be made (an alternative is to use a corded phone). It should be noted that after an emergency, there may be many reasons the phone does not work that are beyond your control, such as heavy traffic or loss of function with the phone system.

4.2.4 INVERTERS

Inverters take the 12-volt DC power from your car battery and convert it to 115-volt AC power that can run household appliances. This can be very important if you need to run power tools in an emergency and the power is out. The inverter will drain your car battery, so look for inverters that have a low battery shutdown feature to prevent total battery drain. You should not run an inverter with the car running unless the manufacturer provides specific instructions with safety guidelines. In addition, the car should not be run in a garage, but rather in a well-ventilated area if the manufacturer approves of such procedures.

4.2.5 BATTERY CHARGERS

Your car battery can be an important source of DC and AC power with an inverter. To keep the car battery charged, you should consider a battery charger as part of your emergency supplies. The charger only works when there is household power or backup power through a generator, but it can recharge your car battery if needed. New units are small and portable and provide a quick charge to a dead battery in only a few minutes and a total charge in a few hours.

4.3 LICENSED CONTRACTORS

Selecting a contractor to do your work is very important. This handbook does not recommend or endorse any particular company. When selecting a contractor, it is necessary to perform proper due diligence and check qualifications. It is up to you to select the companies and verify their records. The Delaware Department of Justice suggests that you get an estimate from at least three reputable contractors. Make sure the contractor is licensed, insured, and has not received complaints. You should always ask for a list of referrals. Get the agreement in writing with the final payment due on completion. The Home Builders Association of Delaware (hbade.org)





can provide guidance on selecting a remodeler. You can also check the Better Business Bureau's Accredited Business Directory online at bbb.org/delaware/accredited-business-guide.

Hiring a licensed contractor is very important. In many areas across the country that have been impacted by disasters, there are numerous examples of families who have lost savings and insurance funds as a wave of unlicensed contractors flooded the impacted area in search of work.

Before you have extensive work performed, you should also consider a consultation with a licensed architect or structural engineer, depending on the particular work that needs to be done. Even if you perform the work yourself, a licensed professional should be consulted for initial guidance, since every house is slightly different.

4.4 HAZARD MITIGATION ASSISTANCE PROGRAM

FEMA's Hazard Mitigation Assistance (HMA) program is intended to encourage investment in long-term mitigation measures to reduce vulnerability to natural hazards. The Delaware Emergency Management Agency (DEMA) and the Delaware Department of Natural Resources and Environmental Control (DNREC) have formed a partnership to administer the HMA program in this state. HMA consists of both the Hazard Mitigation Grant Program (HMGP) managed by DEMA and the Flood Mitigation Assistance (FMA) program managed by DNREC. The state of Delaware hopes to reduce the risk to individuals and property from natural hazards while simultaneously reducing reliance on federal disaster funds. As such, DEMA and DNREC encourage state and local governments to take advantage of funding provided by HMA programs in both the pre- and post-disaster timeframes.

Among other things, the program can provide funds to states to assist homeowners in implementing mitigation measures to existing structures. Some of the project types that have been approved by FEMA for use in assisting homeowners are:

- **Property Acquisition and Structure Demolition**—the acquisition of an existing at-risk structure and/or property and conversion to open space through the demolition of the structure. The property must be deed-restricted in perpetuity to open space uses to restore and/or conserve natural floodplain functions.

- **Property Acquisition and Structure Relocation**—the physical relocation of an existing structure to an area outside of a hazard-prone area or a regulatory erosion zone and, typically, the acquisition of the underlying land. Relocation must conform to all applicable state and local regulations. The property must be deed-restricted in perpetuity to open space uses to restore and/or conserve the natural floodplain functions.
- **Structure Elevation**—physically raising an existing structure to an elevation at or above the Base Flood Elevation or higher if required by FEMA or local ordinance. Structure elevation may be achieved through a variety of methods, including elevating on continuous foundation walls; elevating on open foundations such as piles, piers, posts, or columns; and elevating on fill. Foundations must be designed to properly manage all loads and be appropriately connected to the floor structure above. Utilities must be properly elevated as well. FEMA encourages applicants and sub-applicants to design all structure elevation projects in accordance with the American Society of Civil Engineers (ASCE) 24-05 *Flood Resistant Design and Construction* (cedb. asce.org/cgi/WWWdisplay.cgi?0500268).
- **Structural Retrofitting of Existing Buildings**—modifications to the structural elements of a building to reduce or eliminate the risk of future damage and to protect inhabitants. The essential structural elements of a building to protect in order to prevent damage include foundations, load-bearing walls, beams, columns, structural floors and roofs, and the connections between these elements.

Funding under HMA programs is subject to the availability of appropriations and, for Hazard Mitigation Grant Program funds, to the amount of FEMA disaster recovery assistance specified under a presidential major disaster declaration. To assist in establishing funding priorities, local and state mitigation plans are utilized to identify the highest risks.





Part 5 Protecting Your Property with Insurance

There are several ways to protect your property from natural hazards. The proactive way is to strengthen your house to address specific hazards such as a flood. However, if there is still damage despite all your precautions, insurance can provide resources to aid recovery.

Unfortunately, many homeowners do not find out until it is too late that their insurance policies do not cover flooding. The National Flood Insurance Program (NFIP) offers a separate flood policy that protects for what most people is their single most important financial asset: their home. NFIP coverage is available to all owners of insurable property (a building and/or its contents) in a community participating in the NFIP. Renters may also obtain contents coverage through a NFIP policy.

An overview of the NFIP is on FEMA's *FloodSmart* website (floodsmart.gov/floodsmart/pages/about/nfip_overview.jsp). A list of participating Delaware communities can be found on the NFIP's *Community Status Book* site (fema.gov/national-flood-insurance-program/national-flood-insurance-program-community-status-book).

Not sure about the high costs associated with flooding? All it takes is a few inches of water to cause major damage to your home and its contents. FEMA's NFIP website (floodsmart.gov) includes an interactive tool that demonstrates the cost of flooding and shows you what a flood in your home could cost, inch by inch. What are your chances of experiencing a flood? The site also includes animated flood risk scenarios that demonstrate how various factors impact different neighborhoods, providing excellent illustrations of where flooding can occur and the damage flooding does to a home.

All areas are susceptible to flooding to varying degrees, and flood insurance is an important consideration for all Delaware residents. Homes and businesses in high-risk flood areas having mortgages from federally regulated or insured lenders are required to have flood insurance. While flood insurance is not federally required if you live in a moderate-to-low risk flood area, it is still

available and strongly recommended: The NFIP reports that nearly 20 percent of flood insurance claims come from moderate-to-low risk areas.

No matter where you live, the Delaware Department of Insurance suggests that you prepare for severe weather disasters by creating a home inventory, which will create a record of what you own and what it is worth. A home inventory will help you estimate the value and replacement cost of your possessions in order to ensure that you have sufficient coverage under your homeowner's or renter's insurance policy. The inventory will create a detailed record of what you have in case disaster strikes and you need to provide your insurance company with a comprehensive list of what needs to be replaced. Additional information and a home inventory checklist are included on the Department of Insurance website (delawareinsurance.gov).

5.1 GENERAL INSURANCE INFORMATION

Natural disaster planning is one of the most important duties a homeowner can perform. Protection of life is first and foremost before, during, and immediately following a disaster. It is very important that consumers take time out before a disaster strikes to be certain that insurance concerns have been addressed. Delaware's Department of Insurance (delawareinsurance.gov) provides the following suggestions that consumers should consider before they are faced with a disaster.

Pre-Disaster Activities

- Contact your insurance company or agent and verify that coverages are in place before a disaster strikes. Make sure you have wind coverage protection and flood insurance if your home or business is located in a flood plain area.
- Make sure that you understand the deductible provision of your policy.
- Keep all of your insurance policies in an easily accessible location.
- If forced to evacuate, take copies of important paperwork, including your insurance policy and contact information for your insurance company or insurance agent.
- Be certain you understand the claim procedures of your insurance company.



- 
- 
- Make sure you have insurance up to at least 80 percent of the value on your home to avoid penalties under any co-insurance provision of your policy.
 - Keep all necessary information regarding your health coverage, including prescription information, with your insurance records in the event of an evacuation.
 - Be prepared to board up your windows and doorways to protect your home or business.
 - Have a suitcase packed to last each member of your family for at least two to three days in case you need to evacuate from your home.
 - In the event of a hurricane or flood watch, be sure that your vehicle has sufficient fuel in it in order to relocate to a safe area.
 - Keep available a tarp and other supplies to protect your home in case it is damaged. An insurance policy usually requires the policyholder to protect the property from further damage.

Personal Property



Before a disaster occurs, take photographs or make a video of each room of your home and compile a set of records, old receipts, and bills to help establish the price and age of your property. Write down brand names and model numbers of appliances and electronic equipment and date purchased. Do not forget to list items such as clothing, sports equipment, tools, china, linens, holiday decorations, business equipment, hobby materials, and all other materials associated with your home or business.

Protect Your Home from Damage

Consumers can do a number of things to reduce the cost of their property insurance. Protecting property from possible damage before a disaster can have a major impact on insurers' willingness to continue insuring the property and can also impact future prices the consumer will have to pay in the event their home is met by a disaster. By performing some of the following duties, consumers can make major contributions toward reducing the amount of losses occurring to their home:

- Consider adding storm shutters to the windows and doors of your home.
- Glue or nail down any loose shingles.
- Make certain yard items are tied down or secured. Bicycles, grills, toys, unsecured benches, and any other items not tied down should be placed inside an enclosed building. These items become missiles during a tornado or hurricane.
- If you own a vehicle, do not park it under a tree if a storm is anticipated.
- Take precaution to remove any tree that has the potential of damaging your home during a storm.

Communicate with Your Insurance Agent

Check with your agent and policy declarations pages for information about what is covered:

- Coverage is typically provided in terms of replacement cost or the cost to rebuild your house.
- Does the policy have an inflation guard that increases each year as the cost to rebuild goes up? Construction costs have steadily increased and may increase even more so after a natural disaster.
- Additions or improvements to your house made since your initial policy purchase may not be covered, so it is important to have a periodic appraisal so that your coverage is adequate.
- Check with your insurance agent about possible discounts and incentives. Not all companies provide discounts for hurricane protective devices. These discounts over time can pay for the cost of certain retrofit upgrades.
- Understand your policy. Many policies cover only hurricanes and not lesser events such as a tropical storm or a tropical depression.
- Make sure you have coverage for (1) your main structure, (2) detached structures, (3) the contents in your house, and (4) expenses for loss of use (like hotel stays). Only the first item is required by mortgage lenders, so you may not have sufficient coverage for the remaining items.



5.2 FLOOD INSURANCE

Floods are the most common—and most costly—natural disaster. In the past several years, about 60 percent of all declared disasters involved flooding.

To obtain coverage from flood events, you need flood insurance. Standard homeowners' insurance policies do not provide protection against floods. It is a hard lesson that has been learned by some in Delaware in the past, and it is an unfortunate reality that many people don't find out until it's too late.

Just a few inches of water from a flood can cause tens of thousands of dollars in damage. According to FEMA, over the past five years the average paid flood insurance claim was nearly \$34,000. Flood insurance is the best way to protect yourself from devastating financial loss.

In areas with the greatest risk of flooding, Special Flood Hazard Areas (SFHAs), a building has a 26 percent chance of being flooded during a 30-year mortgage. On average, 25 to 30 percent of all flood insurance claims paid by the NFIP are for property outside of SFHAs. Homeowners, business owners, and renters can all buy flood insurance as long as their community participates in the NFIP.

While some private companies offer flood insurance, most flood insurance in the U.S. is backed by the federal government under the NFIP. Flood insurance is available to homeowners, renters, condo owners/renters, and commercial owners/renters in participating communities through local insurance agents. Costs vary depending on how much insurance is purchased, what it covers, and the property's flood risk.

NFIP rates are set and do not differ from company to company or agent to agent. These rates depend on several factors, including the date and type of construction of your home and your area's level of risk. FEMA reports that the average flood insurance policy costs about \$600 per year. Residential property owners located in low-to-moderate risk areas should ask their insurance agents if they are eligible for the Preferred Risk Policy, which provides very inexpensive flood insurance protection.

If your community participates in the Community Rating System (CRS), you may qualify for an insurance premium discount—in some communities of up to 45 percent—if you live in a high-risk area and up to 10 percent in moderate-to-low risk areas.

You should discuss insuring personal property with your agent, since contents coverage is optional. Typically, there's a 30-day waiting period from date of purchase before your policy goes into effect. That means now is the best time to buy flood insurance—don't wait until a storm is approaching.

The website floodsmart.gov also provides information about flood insurance, including detailed information about what typically is and isn't covered. FEMA's website also assesses the flood risk for any address and provides a list of insurance agents in the area that offer NFIP-backed insurance.





Part 6

Climate Change and Potential Impacts on Natural Hazards

Many scientists consider climate change to be the preeminent environmental issue of our time. Delaware faces multiple challenges from climate change that impact physical, ecological, economical, and cultural aspects of the entire state, especially coastal communities. Climate change effects in Delaware will likely include more extreme weather events (e.g., more droughts, more intense rainfall, and more intense storms and flooding), sea-level rise, and warmer temperatures. These changes are likely to magnify many of the coastal hazards we already face, and this is another good reason to be prepared with strategies and actions to increase the resilience of our homes and communities. This chapter provides an overview of climate change and regional climate trends and describes how these changes may exacerbate impacts of natural hazards.

6.1 CLIMATE CHANGE

Climate is the description of the overall, long-term pattern of weather in a specific area. Weather is typically measured over a period of days or weeks, while climate can be defined as the average weather for a particular region over a 20 to 30 year period.^{6.1} When scientists talk about climate, they're looking at averages of precipitation, temperature, humidity, sunshine, wind velocity, phenomena such as fog, frost, and hail storms, and other measures of the weather that occur over a long period in a particular place.

Climate change refers to alterations in the long-term record of climate components (such as air temperature) sustained over a time period of several decades or longer.^{6.2} Climate change is caused by a combination of natural influences and human activities.

While Earth's climate has experienced periods of natural changes over timeframes of hundreds and thousands of years, the large and rapid changes underway today are unprecedented and have never been recorded over Earth's paleoclimatological record. Climate change is affecting sea level, ocean chemistry, temperatures, length and timing of seasons, and

the amount of annual rain and snowfall.^{6.3} Many of these changes have negative consequences for people and the environment. Individuals and communities are working to reduce their risks from today's climate hazards and tomorrow's effects of climate change.

There have been numerous documented changes in global climate conditions over the past century. To date, the world has seen increases in annual average temperatures, rates of sea-level rise, and altered precipitation patterns, as well as other trends such as increases in weather extremes, changes in the onset of seasons, and the melting of glaciers. Current global climate change trends are expected to continue into the future, and the rate of change for many of these variables is expected to increase.^{6.3}

6.2 REGIONAL CLIMATE TRENDS

In general, the world is getting warmer, the oceans are getting warmer and more acidic, storms are getting more intense, and sea levels are rising at an accelerated rate. However, these general trends and their impacts vary by region.

According to information recently synthesized by the U.S. Global Change Research Program, the northeast and Mid-Atlantic regions of the United States have historically experienced significant variability and extreme events related to weather and climate—floods, droughts, heat waves, and severe storms are characteristic throughout the geographic area.^{6.3} In addition, major cities in the Northeast have experienced episodes of increased illness and deaths during heat waves.^{6.4} Table 6-1 summarizes some documented climate trends.

U.S. climate scientists report that the annual average temperature in the Northeast region (which includes the state of Delaware) has increased by 2°F since 1970, with winter temperatures rising twice this much. Warming has resulted in many other climate-related changes including more frequent very hot days and longer growing seasons.^{6.4} Precipitation has generally increased over the past 100 years. Precipitation extremes appear to be increasing, as indicated by an increase in heavy downpours.^{6.4} Less winter precipitation is falling as snow and more as rain. For the region as a whole, the period between the first and last dates with snow on the ground has decreased by seven days over the past 50 years.^{6.4} While it cannot be proven with certainty,



Table 6-1. Summary of observed and documented current climate trends in the Northeast region.^{6,6}

Climate Change Variable	Current Trend in the Northeast Region	What This Means
Air Temperature	Since 1900, the annual mean temperature has risen 1.5°F, with more rapid increases occurring over the past few decades (2°F since 1970).	Longer, hotter summers increasing drought potential and human health effects.
Ocean Water Temperature	Annual average temperatures in the waters off the southern New England coast have increased by 2.2°F since the 1970s.	Change in species composition and dynamics. Decline of some fish species while other southern species increase. Potential for more harmful algal blooms and invasive species.
Precipitation and Weather	Studies have found a 5 to 17 percent increase in regional precipitation during roughly the last 100 years.	More rainfall in more intense storms means increased risk of flooding. Less snow in winter.
Storminess	Hurricane intensity in the western North Atlantic Ocean has increased.	Increased erosion and damage to roads, bridges, buildings. Interruption of business.
Sea-Level Rise	Rates of local relative sea-level rise are variable across the Northeast region. Sea level in Delaware has risen 13 inches over the past 100 years.	Increased flooding. Loss of waterfront property and impacts to public access.

Table 6.2. Likelihood of occurrence for major climate change conditions in the Mid-Atlantic by 2100.^{6,7}

Projected Change	Likelihood
Warming	Extremely likely (>95 percent chance of occurrence)
Higher sea levels	Extremely likely (>95 percent chance of occurrence)
Higher winter and spring precipitation	Very likely (>90 percent chance of occurrence)
Higher annual precipitation	Likely (>66 percent chance of occurrence)
Higher winter and spring streamflow	Likely (>66 percent chance of occurrence)
Greater hydrological extremes	Likely (>66 percent chance of occurrence)

climatologists have predicted that the rate of sea-level rise occurring today will likely become greater in the decades to come.^{6.5}

Climate data and modeling scenarios that have been compiled and synthesized by a number of organizations can be used to project possible impacts of climate change. Table 6.2 includes a list of possible climate change impacts in the Mid-Atlantic region for the end of this century.^{6.7}

6.3 POTENTIAL CLIMATE CHANGE IMPACTS ON NATURAL HAZARDS IN DELAWARE

Delaware is vulnerable to climate change in several ways. We can expect to see warmer temperatures, more extreme weather events, rising sea levels, shorter winters and longer summers, and winters with less snowfall and more rainfall.^{6.8} Bridges and roads will be more susceptible to damage because of more severe storms and heavy rainfall, resulting in possible impacts to evacuation routes. Sea-level rise and increased storminess may threaten public and private property at the coast, with increased risk of flooding and loss of waterfront land. Increased flooding could also affect inland areas, structures, and facilities.

Changing climate conditions such as temperature increases, altered precipitation patterns, and sea-level rise are projected to exacerbate impacts of natural hazards in Delaware. Some climate change impacts such as precipitation and heat waves will occur quickly in response to increasing temperatures. Others, such as sea-level rise, will continue on longer time scales from decades to hundreds of years. A general overview of potential impacts to coastal storms, floods, winter storms, drought, and other natural hazards is included below.

Coastal Storms

Coastal storms, which can lead to flooding, wind, and coastal erosion impacts, will be affected by climate change in several ways. Climate change may affect tropical system intensity, track, size, and/or rainfall. There is growing evidence that warming sea surfaces have resulted in the increased destructive potential of Atlantic tropical storms since 1970.^{6.9} The increasing intensity of tropical storms is likely to continue in the coming century as ocean waters continue to warm. It has also been found that major





storm tracks have been moving northward and this has been attributed to changing climate.^{6.10}

It is important to note, however, that owing to difficulties in measuring tropical systems, separating the effects of human-influenced climate change from natural variability on hurricane activity is very difficult. At present, it remains uncertain whether past changes in hurricane activity have exceeded the trends and variability due to natural causes.^{6.11}

It is thought that rainfall intensity of storms is likely to increase, causing more riverine and creek flooding.^{6.9} Rising sea levels will exacerbate the negative effects of coastal storms including erosion and flooding. Although the exact destructive potential of storms depends on a given storm's track, it can be said that the threat Delaware faces of future flooding, erosion, and wind impacts is greater than it is today.

Floods

With higher sea levels and more intense storms, the probability will increase for major coastal and inland flooding to occur. Coastal flooding will most directly increase due to sea-level rise and higher storm surge impacts. A rise in sea level will increase the extent of flood damage over time, with areas of lower elevation more susceptible to flooding. Inland flooding will increase due to the changing precipitation patterns (i.e., increased intensity of rainfall events) that are expected for the region. This type of flooding could also be directly affected by land-use decisions, as the amount of permeable surfaces affects rainfall's infiltration potential. During heavy rain events, not only will some roads be impassable due to flooding, but after waters recede, more roads and culverts may need repair. Additionally, the increase in precipitation levels will change streamflow and sediment delivery, with the potential for scouring of bridge foundations.^{6.12}

Winter Storms

Currently there are two climate change impacts that are likely to affect winter storms in Delaware. First, it is believed that precipitation in the winter will become more episodic, with greater amounts of winter precipitation falling in more extreme events.^{6.13} These extremes could exacerbate current winter storms, making the overall effects of the storms worse. Additionally, the increase in average temperature will likely cause a reduction in the amount

of precipitation falling as snow or ice—due to warmer temperatures, precipitation will more likely fall as rain.^{6.13} When snow and ice are reduced and the increased episodic precipitation is rain, Delaware could see an increase in the occurrence of inland flooding during winter storm events.

Drought/Extreme Heat

Climate change is expected to increase the number and intensity of drought and extreme heat events. In Delaware, the first six months of 2012 were the warmest and driest period across the state since records began in 1895.^{6.14} Drought can be caused by both a reduction of precipitation as well as by heat that causes increases in evaporation. Current climate change predictions for the region indicate that precipitation may become more irregular, thus reducing the amount of precipitation that reaches the groundwater system. Additionally, higher temperatures in the region will cause increases in evaporation. These interactions will likely increase the number of short-term droughts—those that last one to three months—making them occur as frequently as once per year.^{6.13}

The number of extreme heat days across the Mid-Atlantic is expected to increase. Though there is no specific data for Delaware, the data for Philadelphia shows that by 2100 the annual number of days over 100°F could be as high as 28, while today there are on average two days above 100°F.^{6.13} Delaware has coastal breezes and a limited heat island effect that will help it as the number of extreme heat days increases. However, Delaware will become increasingly vulnerable to these impacts in the coming century.

Sea-Level Rise

Sea-level rise will not only increase flood heights, but will also change flood patterns in Delaware, causing current design flood events to occur more frequently. Additionally, sea-level rise will cause coastal flooding to reach farther landward. Structures, including homes, roads, and utilities that have been built in low-lying areas can become difficult to access, suffer structural instability, or become unusable.^{6.14} These changes in flood heights and patterns associated with rising sea levels can be applied across many different natural hazard events—coastal storms, severe thunderstorms, and winter storms—that can cause flooding. Sea-level rise will also cause certain dry areas in Delaware to become inundated, meaning that they will eventually





become permanently wet. Other risks associated with sea-level rise include higher water tables and salt intrusion into aquifers. Additional effects of sea-level rise combined with increased frequency and intensity of storms include increased coastal erosion, impacts to coastal wetlands, and decreased effectiveness of existing coastal structures such as seawalls and revetments. Low-lying areas adjacent to these structures may be subject to increased flooding during storms.

6.4 HAZARD MITIGATION AND CLIMATE CHANGE ADAPTATION

With the climate changing and thus increasing the threats from natural hazards, Delaware is becoming increasingly vulnerable to many natural hazards. Communicating risks related to climate change and sea-level rise can be challenging due to scientific uncertainties and long timeframes associated with impacts; the scientific debate has also become politically polarized. Yet most everyone will acknowledge that there is no benefit in waiting to see if projected changes attributed to climate change will impact a specific region. Natural hazards are already taking a toll on individuals and communities, and it is not difficult to convince key stakeholders that specific hazard risks are real and present dangers.

Given Delaware's known natural hazard risks and the ever-increasing certainty of climate change impacts, there are a number of reasons for individuals and communities to proactively mitigate natural hazards and adapt to climate change. Because significant time is required to motivate, develop adaptive capacity, and implement changes, acting now will allow for the time needed to achieve these long-term goals. Additionally, many hazard mitigation measures and adaptation strategies that address existing problems, such as short-term impacts of coastal storms, also provide benefits that help in preparing and planning for long-term effects of sea-level rise.

Another major reason to begin enhancing hazard mitigation efforts with climate change adaptation is that proactive planning is often more effective and less costly than reactive planning and can provide immediate benefits. In fact, many climate adaptation actions appropriate for long-term planning are identical to those employed to manage or mitigate severe and more immediate impacts of other hazards. Examples include floodplain

management plans, beach and dune management strategies, and higher floor elevation requirements to mitigate flood hazards. Integration of hazard mitigation planning (with its focus on past events) with climate change adaptation (and its attention to what might happen in the future) results in a win-win, no-regrets strategy that will prepare individuals and communities for future risk, no matter what the cause.





Appendix A

Emergency Contact Information

County and City of Wilmington Emergency Management

City of Wilmington Emergency Management Office 302-576-3914
New Castle County Office of Emergency Management 302-395-2700
Kent County Department of Public Safety 302-735-2200
Sussex County Emergency Operations Center 302-855-7801

Delaware Emergency Management Agency (DEMA)

302-659-DEMA (3362) or 877-SAY-DEMA
877-729-3362 (Delaware only)
dema.delaware.gov

Delaware Department of Transportation (DelDOT)

800-324-8379, #77, or 302-659-4600 (Transportation Management Center)
deldot.gov
deldot.gov/information/travel_advisory/
deldot.gov/information/projects/tmt/evac_map.shtml
twitter.com/DelawareDOT (Twitter feeds)
deldot.gov/information/syndication (RSS feeds)

Delaware Department of Safety and Homeland Security

dshs.delaware.gov

Delaware Health and Social Services

dhss.delaware.gov/dhss

American Red Cross: Wilmington, Del.

302-656-6620 or 800-777-6620

redcross.org

Federal Emergency Management Agency (FEMA)

800-621-FEMA (3362)

fema.gov





Appendix B

Shelter Information

When an emergency situation warrants shelter activation, information will be released through local radio and television stations, redcross.org, and other available means concerning which specific shelters are available for evacuation purposes and when public shelters will open.

Delaware does not provide lists of shelters prior to emergency situations because shelter locations are subject to change. As situations develop, shelter locations will be determined on a case-by-case basis depending on the type, severity, and expected track of a specific storm or disaster.

If you are advised to evacuate, try to keep family members together and don't forget your evacuation kit, including important papers. It is essential that you take your evacuation kit with you because food, cots, blankets, and other comfort items may not be immediately available. All Delaware counties have made every effort to provide sufficient shelter space for expected evacuees.

If you plan to seek a hotel or motel as your shelter in Delaware or neighboring state, make sure the hotel or motel is open and space is available. Motel rooms tend to fill up quickly when a hurricane is posing a threat to the Mid-Atlantic region.

Prepare a plan for pets in case you must evacuate. Make sure your animal's license and vaccinations are current.

Remember that shelters may be opened selectively depending on the severity of the storm. Should an evacuation become necessary, please listen to your radio or television station or go to redcross.org for up-to-the-minute information on shelters open in your area.

WHAT TO BRING TO A SHELTER

Special dietary foods

Such as diabetic, low salt, liquid diet, and baby food and formula. Food and water are provided in shelters, but if a special diet is required, you should bring these foods with you.

Clothing and bedding

One complete change of clothing including footwear. Sleeping bag, blanket, and pillow (cots for elderly, as cots may not be provided). Rain gear and sturdy shoes.

Personal items

Washcloth, small towel, soap, toothbrush, toothpaste, sanitary napkins, tampons, paper towels, toilet paper, towelettes, etc.

Medications, first-aid supplies

Bring a three- to five-day supply of medications that is clearly marked with your name, dosage, type of medication, and prescribing physician. You must be able to take all medications by yourself. First-aid kit in a waterproof box.

Baby supplies

Clothes, diapers, formula, bottles, food, blankets, portable bed.

Important papers

Name and address of doctors. Name and address of nearest relative not living in area. Identification and valuable papers.

Miscellaneous

Games, cards, toys, battery powered radios, flashlights (no candles or lanterns), batteries, or other reasonable items you may need.

Service animals and pets

Be aware that most shelters will only allow service animals. Depending on the type of disaster, animal shelters may be set up when possible. Pet-friendly shelters will be noted when shelter locations are announced during an evacuation. Pets will be restricted to the pet section of the shelter, and





residents will not be allowed to bring pets into general population areas. Pets should have I.D. tags, and be sure that your pet's license and vaccinations are current. A pet supply kit should include items such as bowls, food, medications, bedding, waste disposal bags, pet carrier/cage, and extra leash/harness.

Remember:

- NO alcoholic beverages or weapons are allowed.
- Take a bath and eat before you leave home.
- Register immediately upon entering the shelter.
- Obey shelter rules.
- Keep the building safe and sanitary.

Appendix C

Construction at the Coast, Beach Management, and Coastal Property Checklist

CONSTRUCTION AT THE COAST

If you're a coastal property owner, it's important to understand the dynamic processes that shape Delaware's shorelines as well as the potential risks and consequences of living at the coast. Most properties along the oceanfront, Delaware Bay front, inland bays, marshes, and tidal rivers are vulnerable to coastal hazards such as storms, erosion, sea-level rise, and flooding. Property owners should be mindful of potential impacts and risks associated with living at the coast. Some basic considerations are included in this section.

Investigations conducted by the Federal Emergency Management Agency (FEMA) and other organizations after major coastal disasters have consistently shown that properly sited, well-designed, and well-constructed coastal residential buildings generally perform well. An excellent source of information for protecting your property at the coast is found in FEMA's *Coastal Construction Manual* (FEMA P-55) available on FEMA's website at fema.gov/library. Prepared by FEMA with assistance from other agencies, organizations, and professionals involved in coastal construction and regulation, this manual is intended to help designers and contractors identify and evaluate practices that will improve the quality of construction in coastal areas and reduce the economic losses associated with coastal disasters.

Additional coastal construction resources and publications are available via FEMA's website (fema.gov/residential-coastal-construction), including various National Flood Insurance Program Technical Bulletins, *Home Builder's Guide to Coastal Construction* (FEMA P-499), *Recommended Residential Construction for Coastal Areas: Building on Strong and Safe Foundations* (FEMA P-550), *Local Official's Guide for Coastal Construction* (FEMA P-762), *Wind Retrofit Guide for Residential Buildings* (FEMA P-804), and *Protecting Manufactured Homes from Floods and Other Hazards* (FEMA P-85).





As part of an ongoing effort to reduce impacts from coastal hazards, restricted building areas for oceanfront and bayfront construction are established with a setback line, which is delineated by DNREC's building line. Established as part of the *Regulations Governing Beach Protection and the Use of Beaches*, the building line controls construction activities on beaches and dunes so that these coastal features are able to perform their protective and recreational functions. The building line, which parallels the coastline, is designated on DNREC maps for ocean and Delaware Bay beaches. No construction may take place seaward of the line without a coastal construction permit. Construction proposed to be located within the defined beach area and landward of the building line requires a coastal construction letter of approval from DNREC.



Permitting guidelines are designed to ensure that structures are located behind the primary dune or as far landward as possible on the lot to reduce impact on the primary sand dune or active beach area. It is advisable to build as far away from the shoreline as possible and to develop on the highest elevation of the property, but not on the coastal dunes. It is important for property owners to realize that the required building setback established by the state of Delaware does not guarantee a safe location. Every lot is different, so be sure to contact DNREC prior to conducting any construction activities.

Building codes in flood-prone areas, including coastal high-hazard areas, require structures to be built to a minimum height above Base Flood Elevation (BFE). These elevations are identified on Flood Insurance Rate Maps (FIRMs). A FIRM is an official map of an area's special hazard areas and flood risk premium zones. They are used to determine flood insurance rates and should be available at your local town hall, county planning office, state flood mitigation office, or the Federal Emergency Management Agency. Contact your local building official for additional information on BFEs and flood zone information for your property.



DO'S AND DON'TS

Do:

- Gain an understanding of local coastal processes, wave conditions, and how the beach changes seasonally. The beach can look very different in February and March than it does in August and September.
- Determine whether the land has experienced flooding in the past, including any details such as how high the water was and if waves washed over the property.
- Determine whether all buildings meet current BFE requirements.
- Locate all structures and improvements well away from the shoreline to allow the beach space to migrate as well as minimize risks from coastal hazards.
- Investigate the history and status of any shoreline structures on the property to confirm their legality. New homeowners assume responsibility for existing structures whether they are legal or not.
- Investigate alternative erosion management measures if necessary.
- Maintain the natural dune features and native plants around the shoreline area.

Don't:

- Build structures within a coastal high hazard area that are likely to be threatened by waves or erosion.
- Assume the shoreline is stable just because it looks wide.
- Assume you will be granted authorization for a shoreline structure just because the shoreline is eroding. There are specific criteria that must be met in order to obtain permission for shoreline structures.
- Alter, grade, trample on, or reduce the height of the coastal dune.





BEACH MANAGEMENT IN DELAWARE

Coordination of federal, state, and local agency activities is necessary to support regional approaches to addressing coastal erosion and storm damage to beaches. Government agencies that assist the state include the U.S. Army Corps of Engineers, NOAA, FEMA, and the Department of the Interior. The need for a comprehensive, coordinated, and proactive approach to shoreline management is emphasized by numerous factors: The coast is actively changing and moving; storm activity can, and very often does, dramatically alter the coast; and coastal population and development continues to increase. Delaware's comprehensive coastal planning and regulatory programs continue to evolve with coastal science and general understanding of processes that impact all aspects of the coast. The science and management tools of shore protection have generally progressed from building structures designed to protect buildings (seawalls and bulkheads) to practices that protect and enhance the natural beach (construction setbacks, dune protection, and beach nourishment).

Along the immediate coast, beach nourishment is one of the strategies used to minimize storm damage to personal property and public infrastructure. Beach nourishment is the process of adding sand to an eroding beach to restore its width and elevation to specified, engineered dimensions. Used almost exclusively in developed beach areas, nourishment is commonly accomplished by pumping sand onto the beach from an offshore source using a dredge, although it may also be conducted by trucking sand onto the beach.

Beach nourishment does not prevent erosion or stop the movement of sand along a beach. It is actually a strategy that resets the erosional clock by adding sediment to the system and reestablishes the buffer of sand between the ocean and structures. To be effective over the long term, beach nourishment projects must be periodically maintained by adding more sand.

Faced with an increasing demand for beach services that includes storm protection, DNREC has developed a management approach that incorporates several different tools to mitigate impacts of shore erosion. Beach preservation efforts in Delaware took a significant turn in response to the *Beaches 2000 Report to the Governor*. The committee behind the report saw the merits in beach nourishment as long as the benefits resulting from

the nourishment exceeded the cost of conducting the work. This remains the policy of the state, and economic analyses of beach nourishment work along the Atlantic Ocean coast were conducted in 1998 and again in 2004 to ensure that nourishment costs return economic values that are higher than project implementation costs.

DUNES AND DUNE MANAGEMENT

Sand dunes—ridges or mounds of windblown sand—are an integral part of Delaware’s beach system. Dunes are vital to shoreline stability because they are protective features that also serve as reservoirs for sand. They are resilient natural barriers to the destructive forces of coastal storms and offer the least expensive and most efficient defense against flooding tides and waves.

Coastal storms can destroy even well-established dunes. During storms, high-energy waves may wash against the base of the dunes, eroding sand and undermining the seaward dune face. In extreme storms, the dune face may recede significantly and the dune itself may be destroyed. During storm events, dune sand is removed and redistributed along the beach—essentially the dunes act as a sand storage system and a buffer between waves and coastal property. Depending on the size of the dune and intensity of the storm, high continuous dunes can provide a barrier to storm surge and overwash, thereby reducing flooding on the landward side.

Natural dune recovery after a storm depends on the severity of the storm and the initial condition of the dune. The front dunes can be severely eroded or completely flattened or overtopped during a storm. In the days and weeks after a storm, waves begin to push sand from nearshore bars back to shore to rebuild the beach. Eventually sufficient sand returns to the beach, and the dune begins to recover from storm damage as the wind blows sand up into the dune area. Natural dune rebuilding processes operate relatively slowly. Left solely to natural processes, dunes may take years or even decades to recover after a severe storm.

Because dunes play such a direct role in providing storm and flood protection, it’s important to remember that removal of dune material will increase flood risk. The NFIP prohibits all manmade alteration of sand dunes within VE and V zones unless an engineering analysis demonstrates that the activity will not result in an increased flood risk.





There are many ways for individuals and communities to help protect Delaware dunes:

- Place signs on the dune to explain the importance of keeping off of the beach grass and dunes.
- Restore damaged dunes, plant vegetation, and put up dune fencing to restrict traffic. Do not remove any material from the dune—all sand should remain on the dune and beach system.
- Use designated dune walkovers and access points to control pedestrian and vehicular traffic flow across dunes. All planted areas should be protected from vehicles, pedestrians, and pets.
- Allow beach grass and dune vegetation to grow naturally. Mowing destroys the grasses' ability to trap sand and may kill the plants.
- Maintain a clear, clean, and natural dune environment. Items such as Christmas trees, cut shrubs, and yard clippings will smother natural dune vegetation and may also become a fire hazard. This type of debris should not be placed on the dune or beach. Similarly, items such as cars, trucks, bikes, and boats should be kept off of the dune.
- Avoid hard landscaping such as railroad ties, flower boxes, retaining walls, piling tops, large stone, brick, cement blocks, and concrete. These items should not be placed in dune environments. They are easily lifted by storm waves, becoming debris that can batter your home and adjacent buildings and may cause severe damage or loss of property.

COASTAL PROPERTY CHECKLIST

If you live along the immediate coast, you are more vulnerable to the effects of coastal storms. High winds and waves may damage and destroy improperly constructed homes. Floating debris can crack foundation piles, causing collapse of the home or severe damage to windows and doors. Pressure from floodwaters on solid foundations can lead to collapse.

You can prevent or minimize damage by taking precautions during initial construction or by making modifications to an existing home. The following checklist is not all-inclusive and is not intended to replace local building code requirements or to serve as the only options for protecting your home from storm damage. For more information, contact your local building official or a building professional such as a coastal engineer, architect, or experienced contractor.

FLOODING

- Do you know the projected flood elevation for your area? Ask your building department to see a flood map of your community.
- Do you know the estimated long-term erosion rates for your area? Are any actions such as beach nourishment or other erosion control projects being implemented to mitigate long-term erosion?
- Is the first floor of the dwelling located above the projected flood elevation for your area?
- Is your home located in a V zone? Inclusion in a V zone indicates the potential for waves of three feet or greater in a storm event having a 1 percent chance of being equaled or exceeded in any given year. Retaining walls, bulkheads, or other soil management structures located underneath, connected to, or in close proximity to existing or proposed buildings are generally prohibited within V zones.
- If your house is elevated on piles, do you have an open foundation, free of obstruction, that allows fast-moving waves and water to flow beneath the building?





- If storage areas or other enclosures are needed below projected flood elevations, they must be constructed with breakaway walls to allow water to flow through unobstructed. Is your enclosure breakaway?
- Are steps used for accessing the beach from the structure or the pedestrian dune crossover elevated or removed out of the reach of waves and floodwaters?
- Are the main electric panel, outlets, and switches located at least 12 inches above potential floodwaters?
- Are the washer, dryer, furnace, and water heater elevated above potential floodwaters?
- Are outside air-conditioning compressors and heat pumps elevated above expected flood levels?
- Is the fuel tank securely anchored? It can tip over or float in a flood, causing fuel to spill or catch fire. Cleaning a house inundated with oil-contaminated water can be difficult and expensive.
- What is the orientation of crossbracing on the pilings? Diagonal bracing will obstruct velocity floodwaters and waves and will often trap debris, therefore bracing is often placed parallel to the primary direction of flow. Check with your architect or engineer.
- Does the sewer have a backflow valve? Contact a licensed plumber to install the valve.
- Are there potential projectiles such as landscaping ties, cinder blocks, cement patio blocks, pile butts, or split rail fences located in the pathway of waves and flood waters? These objects can crack and damage piles and lower level enclosures, causing possible collapse of the structure.

WIND

- Are windows and exposed glass surfaces protected by coverings?
This is one of the best ways to protect your home against wind and flying debris.

- Is the roof fastened to the walls with galvanized metal hurricane clips? This will reduce the risk of losing your roof to high winds.
- Are the galvanized clips, straps, hangers, and joist-to-beam ties corrosion free? Corroded metal components can fail during extreme wind events. These should be replaced when corroded.
- Are the foundation piles notched less than 50 percent of the pile cross section? Overnotching can lead to failure of the piles.
- Are deck and lawn furniture, which are likely to become airborne debris, securely fastened or taken indoors?

EROSION

- Are your foundation piles deep enough to survive a coastal storm?
- Is your property protected by a maintained beach and dune system? Is that project currently being maintained to its intended design? Is the dune in front of your home well vegetated to prevent wind erosion? Is the dune of sufficient height and width to prevent overtopping by waves during a storm?
- Are there bare, low areas in the dune created by walking over the dune to access the beach? These areas are weak spots that will allow waves to flow over the dune and cause loss of the dune and subsequently allow waves and water into the house.
- Do not undertake any dune alteration activity unless a proper engineering analysis demonstrates that there will be no increase in flood risk. The NFIP prohibits manmade alteration of sand dunes within VE and V zones, which would increase potential flood damage.
- Is your home built on a concrete slab and located on the ocean or bay front? Concrete slabs can be undermined and destroyed during storms, causing the collapse of the structure. Crawl-space homes are also vulnerable to undermining. If possible, elevate the structure on pilings.



- 
- Does your home have a septic system located in a coastal high-hazard area (V zone)? Both buried and mound septic systems are frequently exposed, destroyed, or displaced during coastal storm events. Special design criteria must be used to protect septic systems in areas vulnerable to high-velocity flooding, wave action, erosion, and storm damage. See www.dnrec.delaware.gov/swc/Shoreline/Documents/designing_septic_systems_coastal_areas.pdf for more information and contact appropriate local and state officials before beginning work.

STRUCTURAL

- Inspect strapping and connectors for corrosion and replace if necessary.
- Check roof for loose or missing shingles. Be certain gutters are clear of debris.
- Inspect condition of storm shutters or plywood used to protect windows and doors. Cover all large windows and doors (especially patio doors) with securely fastened, impact-resistant shutters with proper mounting fixtures.
- Make sure all doors and windows are caulked and/or weather stripped.
- Inspect sewer backflow valves.
- Inspect condition of elevated utilities and supporting platforms. Be sure utilities are securely anchored to the supporting frame.

LOT AND LAND AREA

- Remove, secure, or store any objects that may be carried by waves or winds (e.g., deck furniture, landscaping, construction materials, etc.).
- Raise or remove steps accessing the beach.
- Check condition of dune (width and elevation). Inspect condition of beachgrass. Replant bare areas in the spring and fertilize as needed.
- Trim back dead or weak branches from trees.

Endnotes

- 1.1 *Delaware Coastal Storm Climatology and Damage Assessment 1871-2009*. Report prepared by D. J. Leathers, D. R. Legates, and R. S. Scarborough. University of Delaware Department of Geography, 2011.
- 2.1 *The Saffir-Simpson Hurricane Wind Scale*. National Weather Service website. Accessed August 2012 at www.nhc.noaa.gov/aboutsshws.php.
- 2.2 *The Hurricane of October 21-24, 1878*. Prepared by K. W. Ramsey and M. J. Reilly; Delaware Geological Survey Special Publication No. 22, 2002.
- 2.3 *Summary Report—The Coastal Storms of January 27-29 and February 4-6, 1998, Delaware and Maryland*. Prepared by K. W. Ramsey, D. J. Leathers, D. V. Wells, and J. H. Talley, University of Delaware; Delaware Geological Survey Open File Report No. 40, 1998.
- 2.4 *Freeboard*. Storm Smart Coasts-Delaware website available online at de.stormsmartcoasts.org.
- 2.5 *Tornadoes*. Federal Emergency Management Agency's *Ready—Prepare, Plan, Stay Informed* webpage. Accessed August 2012 at ready.gov/tornadoes.
- 2.6 *Thunderstorm Hazards—Tornadoes*. National Weather Service website. Accessed August 2012 at www.srh.noaa.gov/jetstream/tstorms/tornado.htm.
- 2.7 *Public Information Statement* issued 9/4/2012 by the National Weather Service Mt. Holly, NJ. Accessed September 2012 at www.erh.noaa.gov/phi/index.php.
- 2.8 *Tornado History Project* website. Copyright 2005-2012. Accessed June 2012 at tornadohistoryproject.com.
- 3.1 *Turn Around Don't Drown*. National Weather Service website. Accessed August 2012 at www.srh.weather.gov/tadd.
- 3.2 *Thunderstorms, Tornadoes, Lightning...Nature's Most Violent Storms*. National Weather Service website. Accessed August 2012 at nws.noaa.gov/os/severeweather/resources/ttl6-10.pdf.
- 4.1 *Risks - Hurricanes*. Insurance Institute for Business and Home Safety website. Accessed August 2012 at disastersafety.org/hurricane.
- 4.2 *Mitigation Directorate*. Federal Emergency Management Agency website. Accessed August 2012 at fema.gov.
- 4.3 *Residential Coastal Construction Manual (FEMA P-55)*. Federal Emergency Management Agency, 2011. Accessed August 2012 at fema.gov/residential-coastal-construction.
- 4.4 *Is Your Home Protected from Hurricane Disaster? A Homeowner's Guide to Retrofit*. Insurance Institute for Business & Home Safety, 1998.
- 4.5 *Disaster Safety Videos*. Insurance Institute for Business and Home Safety website. Accessed August 2012 at disastersafety.org.



- 
- 4.6 *Mitigation Assessment Team Report: Hurricane Ike in Texas and Louisiana—Building Performance Observations, Recommendations, and Technical Guidance* (FEMA P-757). Federal Emergency Management Agency, April 2009. Accessed August 2012 at fema.gov.
- 4.7 *Synthetic Roof Underlayment*. National Association of Homebuilders (NAHB) Research Center, ToolBase Services website. Copyright 2001. Accessed August 2012 at toolbase.org/Technology-Inventory/Roofs/synthetic-roof-underlayment.
- 4.8 *Homeowner's Guide to Retrofitting: Six Ways to Protect Your House from Flooding* (FEMA L-235-brochure and FEMA P-312-detailed manual). Federal Emergency Management Agency, December 2009. Accessed August 2012 at fema.gov.
- 4.9 *Protecting Your Property from Flooding*. FEMA website, June 2009. Accessed August 2012 at fema.gov.
- 4.10 *Hurricane Proofing Installation*. International Hurricane Protection Association website. Copyright 2009. Accessed August 2012 at inthpa.com.
- 4.11 Window Film Information Center. International Window Film Association website. Accessed August 2012 at www.iwfa.com.
- 4.12 *Bracing Garage Doors*. National Weather Service website. Accessed August 2012 at www.prh.noaa.gov/cphc/HAW/garage_doors.php.
- 4.13 *Electrical Safety Precautions During Disasters*. Consumer Product Safety Commission Electrical Safety Foundation International website. Copyright 2010. Accessed August 2012 at publications.usa.gov/epublications/safety/precautions.htm.
- 4.14 *Guidelines for Handling Water Damaged Electrical Equipment*. National Electrical Manufacturers Association (NEMA) website. Copyright 2010. Accessed August 2012 at nema.org/stds/water-damaged.cfm.
- 6.1 *Glossary of Climate Change Terms*. U.S. EPA Climate Change website. Accessed August 2012 at epa.gov/climatechange/glossary.html.
- 6.2 *Glossary of Meteorology*, 2nd Edition. T. S. Glickman. American Society of Meteorology, Chicago, Illinois: University of Chicago Press, 2000.
- 6.3 *Global Climate Change Impacts in the United States*. U.S. Global Climate Change Research Program, 2009. Accessed August 2012 at globalchange.gov.
- 6.4 *Northeast Regional Highlights Fact Sheet*. From *Global Climate Change Impacts in the United States* report, 2009. Accessed August 2012 at globalchange.gov/publications/reports/scientific-assessments/us-impacts/regional-climate-change-impacts/northeast.
- 6.5 *Global Climate Projections*. Chapter 10 in *Climate Change 2007: Working Group I: The Physical Science Basis* by the Intergovernmental Panel on Climate Change (IPCC), 2007. Available online at ipcc.ch/publications_and_data/publications_and_data.shtml.
- 6.6 *Climate Change & Rhode Island's Coasts – Past, Present, and Future*. L. Heffner, R. Williams, V. Lee, P. Rubinoff, C. Lord. URI Coastal Resources Center/Rhode Island Sea Grant, 2012. Available online at nsgl.gso.uri.edu/riu/riut12001.pdf.

- 6.7 *Climate Change and Uncertainty in the Mid-Atlantic Region*. R. G. Najjar. Coastal Habitat Conservation in a Changing Climate: Strategies and Tools in the Mid-Atlantic Region. Wilmington, Del., 2012. Available online at collaborate.csc.noaa.gov/climateadaptation/Coastal%20Habitat%20Conservation/Workshop%20Presentations/Najjar_MidAtlanticCC_Jun21.pdf.
- 6.8 *Climate Change and the Delaware Estuary: Three Case Studies in Vulnerability Assessment and Adaptation Planning*. D. Kreeger, J. Adkins, P. Cole, R. G. Najjar, D. Velinsky, P. Conolly, and J. Kraeuter. Partnership for the Delaware Estuary, PDE Report No.10-01, 2010. Available online at delawareestuary.org/science_programs_climate_change.asp.
- 6.9 *Comprehensive Assessment of Climate Change Impacts in Maryland*. Report to the Maryland Commission on Climate Change Chapter 2, D. F. Boesch, and J. M. Hawkey, (eds.), 2008. Available online at mde.maryland.gov/programs/air/climatechange/documents/final-chapt%202%20impacts_web.pdf.
- 6.10 *A Consistent Poleward Shift of the Storm Tracks in Simulations of 21st Century Climate*. J. H. Yin. *Geophysical Research Letters* 32: L18701, DOI:10.1029/2005/GL023684, 2005. Available online at www.cgd.ucar.edu/~jyin/IPCC_paper_GRL_Jeff_Yin_final.pdf.
- 6.11 *Projections of Future Tropical Cyclone Activity*. I. Ginis. University of Rhode Island Climate Change Science Symposium, May 5, 2011.
- 6.12 *Potential Impacts of Climate Change on U.S. Transportation: Special Report 290*. 2008. National Research Council, Committee on Climate Change and U.S. Transportation. The National Academies Press, Washington D.C., 2008.
- 6.13 *Northeast Climate Impacts Assessment Report*. Climate Change in the U.S. Northeast, 2006. Available online at climatechoices.org/assets/documents/climatechoices/NECIA_climate_report_final.pdf.
- 6.14 *First Six Months of 2012 Warmest and Driest in Last 118 Years*. News from the Office of the Delaware State Climatologist, 2012. Accessed August 2012 at climate.udel.edu.
- 6.14 *Preparing for Tomorrow's High Tide*. A Progress Report of the Delaware Sea Level Rise Advisory Committee, November 2011; Delaware DNREC. Available online at: www.dnrec.delaware.gov/coastal/Documents/SLR%20Advisory%20Committee/Finalized%20Documents/SLRProgressReportFinalNov2011.pdf.



Acronyms and Abbreviations



ASCE: American Society of Civil Engineers
BFE: Base Flood Elevation
CRS: Community Rating System
DEMA: Delaware Emergency Management Agency
DelDOT: Delaware Department of Transportation
DENS: Delaware Emergency Notification System
DFIRM: Digital Flood Insurance Rate Map
DNREC: Delaware Department of Natural Resources and
Environmental Control
EAS: Emergency Alert System
EPA: Environmental Protection Agency
°F: Degrees Fahrenheit
FEMA: Federal Emergency Management Agency
FIRM: Flood Insurance Rate Map
FMA: Flood Mitigation Assistance
GFCI: Ground Fault Circuit Interrupter
HMA: Hazard Mitigation Assistance
HMGP: Hazard Mitigation Grant Program
IBC: International Building Code
IBHS: Insurance Institute for Business and Home Safety
MAT: Mitigation Assessment Team
MLLW: Mean Lower Low Water
MPH: Miles Per Hour
NAHB: National Association of Homebuilders
NEMA: National Electrical Manufacturers Association
NFIP: National Flood Insurance Program
NOAA: National Oceanic and Atmospheric Administration
NWS: National Weather Service
SFHA: Special Flood Hazard Area
TMC: Transportation Management Center

Useful Links and Resources

This page includes links to websites where you can get more information on planning and preparing for a natural hazard.

American Red Cross: redcross.org

- Disaster Preparedness for Pets: redcross.org/prepare/disaster/pet-safety

Delaware Citizen Corps: delawarecitizencorps.org

Delaware Department of Insurance: delawareinsurance.gov

Delaware Department of Natural Resources and Environmental Control (DNREC): dnrec.delaware.gov

Delaware Department of Transportation (DelDOT): deldot.gov

- Evacuation Route Maps: deldot.gov/information/projects/tmt/evac_map.shtml
- Interactive Traffic Maps: deldot.gov/traffic/map.ejs

Delaware Emergency Management Agency (DEMA):
dema.delaware.gov

Delaware Emergency Preparedness Voluntary Registry:
de911assist.delaware.gov

Delaware Electric Cooperative: delaware.coop

Delaware Sea Grant College Program: deseagrant.org

Delmarva Power: delmarva.com

Electrical Safety Foundation: esfi.org

Federal Alliance for Safe Homes: flash.org

Federal Emergency Management Agency (FEMA): fema.gov

- *Against the Wind: Protecting your Home from Hurricane and Wind Damage* (FEMA 247). Available at fema.gov/library.



- *Coastal Construction Manual: Principles and Practices of Planning, Siting, Designing, Constructing, and Maintaining Residential Buildings in Coastal Areas* (FEMA P-55). Available at fema.gov/library.
- *Home Builder's Guide to Coastal Construction*. Technical Fact Sheet Series, (FEMA P-499). Available at fema.gov/library.
- *Homeowner's Guide to Retrofitting: Six Ways to Protect Your Home From Flooding* (FEMA P-312). Available at fema.gov/library.
- *Local Officials Guide for Coastal Construction* (FEMA P-762). Available at fema.gov/library.
- National Flood Insurance Program (NFIP): floodsmart.gov
- NFIP Interactive Tool for Flood Costs and Flood Risk Profile Tools: floodsmart.gov/floodsmart/pages/flooding_flood_risks/defining_flood_risks.jsp and floodsmart.gov/floodsmart/pages/flooding_flood_risks/the_cost_of_flooding.jsp
- NFIP Technical Bulletins: fema.gov/national-flood-insurance-program-2/nfip-technical-bulletins
- Ready—Prepare, Plan, Stay Informed: ready.gov
- *Recommended Residential Construction for Coastal Areas: Building on Strong and Safe Foundations* (FEMA P-550). Available at fema.gov/library.
- Safer, Stronger, Protected Homes and Communities: fema.gov/safer-stronger-protected-homes-communities
- *Wind Retrofit Guide for Residential Buildings* (FEMA P-804). Available at fema.gov/library.

Insurance Institute for Business and Home Safety: ibhs.org

National Flood Insurance Program: floodsmart.gov

NOAA: noaa.gov

- Coastal Services Center: csc.noaa.gov

NOAA National Weather Service: weather.gov

- Flood Safety: nws.noaa.gov/floodsafety
- Mt. Holly, N.J. Forecast Office: www.erh.noaa.gov/er/phi
- National Hurricane Center: www.nhc.noaa.gov and www.nhc.noaa.gov/prepare
- Severe Weather Safety: nws.noaa.gov/os/severeweather/resources/ttl6-10.pdf and nws.noaa.gov/om/severeweather/index.shtml
- Weather Radio: weather.gov/nwr


Prepare Delaware: preparedede.org







TORNADOES

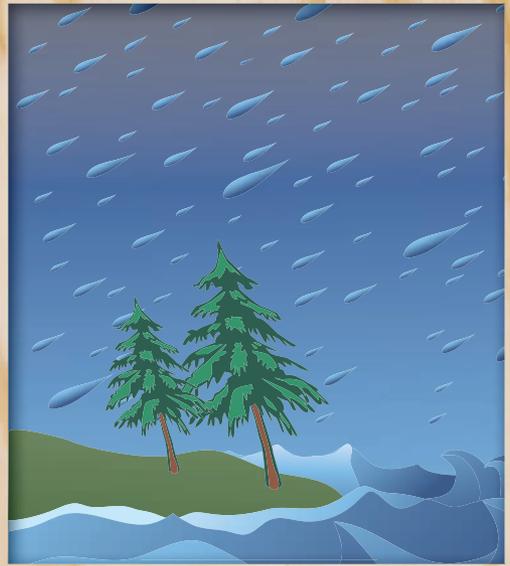

COASTAL STORMS



FLOODS

